



# SERVICE

*noun*

\`sər-vəs\`

The action of helping customers with what they need.

## For Offices, Warehouses, & More!



AX456



AX500

### Amerex® ABC DRY CHEMICAL FIRE EXTINGUISHERS

use a monoammonium phosphate dry chemical to insulate Class A fires by melting and clinging to the heated surface. On Class B fires, they smother and break the chain reaction and are non-conductors of electricity. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX417T	5.5 lb	15 <sup>1</sup> / <sub>2</sub> "	5 <sup>3</sup> / <sub>4</sub> "	3"	—
AX500	9.25 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX500T	9.5 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX424	10.5 lb	15 <sup>1</sup> / <sub>2</sub> "	8"	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX402	9.25 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX402T	9.5 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX456	18 lb	20"	7 <sup>3</sup> / <sub>4</sub> "	5"	5HB
AX441	19.5 lb	20 <sup>1</sup> / <sub>2</sub> "	8 <sup>3</sup> / <sub>4</sub> "	5"	5HB
AX411	38 lb	24"	10 <sup>1</sup> / <sub>4</sub> "	7"	15HB
AX423	39 lb	24"	10 <sup>1</sup> / <sub>4</sub> "	7"	15HB

P/N	DESCRIPTION	UL RATING
AX417T	2.5 lb ABC w/ Vehicle Bracket	1A:10B:C
AX500	5 lb ABC w/ Wall Hanger	2A:10B:C
AX500T	5 lb ABC w/ Vehicle Bracket	2A:10B:C
AX424	5 lb ABC w/ Brass Valve & Wall Hanger	2A:10B:C
AX402	5 lb ABC w/ Wall Hanger	3A:40B:C
AX402T	5 lb ABC w/ Vehicle Bracket	3A:40B:C
AX456	10 lb ABC w/ Wall Hanger	4A:80B:C
AX441	10 lb ABC w/ Brass Valve & Wall Hanger	4A:80B:C
AX411	20 lb ABC w/ Wall Hanger	10A:120B:C
AX423	20 lb ABC w/ Brass Valve & Wall Hanger	10A:120B:C

→ **More ABC DRY CHEMICAL FIRE EXTINGUISHERS Available - Call for Pricing**



AX403T



AX453



AX457



AX412

### AMEREX® FIRE EXTINGUISHERS

Perfect for kitchens, garages, boats, and vehicles, **Amerex® BC DRY CHEMICAL FIRE EXTINGUISHERS** contain a siliconized sodium bicarbonate based dry chemical, making them suitable for combating flammable liquid and pressurized gas fires. They are electrically non-conductive, and the chemical, by nature, will not bake to hot surfaces, allowing for easy clean-up. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX620T	2.5 lb	10"	3 <sup>1</sup> / <sub>2</sub> "	2 <sup>5</sup> / <sub>8</sub> "	—
AX403T	5.5 lb	15 <sup>1</sup> / <sub>2</sub> "	5 <sup>3</sup> / <sub>4</sub> "	3"	—
AX453	9.75 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX457	18 lb	20"	7 <sup>3</sup> / <sub>4</sub> "	5"	5HB
AX412	38 lb	24"	10 <sup>1</sup> / <sub>4</sub> "	7"	15HB

P/N	DESCRIPTION	UL RATING
AX620T	1 lb BC w/ Vehicle Bracket	2B:C
AX403T	2.5 lb BC w/ Vehicle Bracket	10B:C
AX453	5.5 lb BC w/ Wall Hanger	40B:C
AX457	10 lb BC w/ Wall Hanger	60B:C
AX412	20 lb BC w/ Wall Hanger	120B:C

→ **More BC DRY CHEMICAL FIRE EXTINGUISHERS Available - Call for Pricing.**

Specially designed for commercial and industrial applications that handle, transport, process, or store large quantities of flammable liquids and gases, these **Amerex® HIGH FLOW PORTABLE FIRE EXTINGUISHERS** are the perfect choice, especially for spills on flat horizontal surfaces with combustible/non-combustible materials and potential obstacles to fighting a fire. They are made with the same hardware and valve components as **Amerex's** standard models but with twice the flow rate. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX720	19.5 lb	20 <sup>1</sup> / <sub>2</sub> "	8 <sup>3</sup> / <sub>4</sub> "	5"	5HB
AX760	39 lb	24"	10 <sup>1</sup> / <sub>4</sub> "	7"	15HB
AX722	19.5 lb	20 <sup>1</sup> / <sub>2</sub> "	8 <sup>3</sup> / <sub>4</sub> "	5"	5HB
AX762	39 lb	24"	10 <sup>1</sup> / <sub>4</sub> "	7"	15HB

P/N	DESCRIPTION	UL RATING
AX720	10 lb ABC w/ Wall Hanger	1A:20B:C
AX760	20 lb ABC w/ Wall Hanger	4A:60B:C
AX722	10 lb PK w/ Wall Hanger	20B:C
AX762	20 lb PK w/ Wall Hanger	60B:C



**Amerex® CHROME ABC and BC DRY CHEMICAL FIRE EXTINGUISHERS** are chrome-plated steel cylinders. A great choice for homes, offices, and autos as well as recreational and off-road vehicles. USCG approved with bracket listed on the UL label, except for **AX620TC**.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX620TC	2.5 lb	10"	3 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>8</sub> "	—
AX417TC	5.5 lb	15 <sup>1</sup> / <sub>2</sub> "	5 <sup>3</sup> / <sub>4</sub> "	3"	—
AX500TC	9.5 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX456C	18 lb	20"	7 <sup>3</sup> / <sub>4</sub> "	5"	5HB

P/N	DESCRIPTION	UL RATING
AX620TC	1 lb BC Chrome w/ Vehicle Bracket	2B:C
AX417TC	2.5 lb ABC Chrome w/ Vehicle/Marine Bracket	1A:10B:C
AX500TC	5 lb ABC Chrome w/ Vehicle/Marine Bracket	2A:10B:C
AX456C	10 lb ABC Chrome w/ Wall Hanger	4A:80B:C



**Amerex® PURPLE K FIRE EXTINGUISHERS** contain specially fluidized and siliconized potassium bicarbonate dry chemical that is most effective on Class B flammable liquids and pressurized gases. They are electrically non-conductive and have long been the choice of oil, gas, chemical, and utilities companies. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX479T	9.5 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
AX460	19.5 lb	20 <sup>1</sup> / <sub>2</sub> "	8 <sup>3</sup> / <sub>4</sub> "	5"	5HB
AX413	38 lb	24"	10 <sup>1</sup> / <sub>4</sub> "	7"	15HB
AX415	39 lb	24"	10 <sup>1</sup> / <sub>4</sub> "	7"	15HB

P/N	DESCRIPTION	UL RATING
AX479T	5 lb PK w/ Vehicle Bracket	30B:C
AX460	10 lb PK w/ Brass Valve & Wall Hanger	80B:C
AX413	20 lb PK w/ Wall Hanger	120B:C
AX415	20 lb PK w/ Brass Valve & Wall Hanger	120B:C



# 1 FIRE EXTINGUISHERS & CHEMICAL



AX384T



AX385TS



AX386T



AX397



AX398



AX352TS



DDPAX361

An environmentally safe replacement for Halon 1211, **Amerex® HALOTRON® I FIRE EXTINGUISHERS** contain a hydrochlorofluorocarbon (HCFC-123) blend agent that discharges as a rapidly evaporating liquid, leaving no residue. Pressurized with argon gas, the **Halotron I** agent is an EPA approved "clean agent" for Class A, B, and C hazards that will not conduct electricity back to the operator. Models **AX386T**, **DDPAX386TC**, **AX397**, and **AX398** are USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX384T	3.25 lb	10"	3 1/2"	2 5/8"	—
AX385TS	5.25 lb	15 1/2"	6 3/8"	3"	—
DDPAX385TSC	5.25 lb	15 1/2"	6 3/8"	3"	—
AX386T	9.5 lb	15 1/4"	5 3/4"	4 1/4"	5DC
DDPAX386TC	9.5 lb	15 1/4"	5 3/4"	4 1/4"	5DC
AX397	22.5 lb	21 7/8"	9 1/4"	6"	10HB
AX398	27.5 lb	21 7/8"	9 1/4"	6"	10HB
DDPAX891	115 lb	37 3/8"	9"	9"	—
DDPAX892	258 lb	39 3/4"	14"	14"	—

P/N	DESCRIPTION	UL RATING
AX384T	1.4 lb Halotron I w/ Vehicle Bracket	1B:C
AX385TS	2.5 lb Halotron I w/ Vehicle Bracket	2B:C
DDPAX385TSC	2.5 lb Chrome Halotron I w/ Vehicle Bracket	2B:C
AX386T	5 lb w/ Halotron I Vehicle Bracket	5B:C
DDPAX386TC	5 lb Chrome Halotron I w/ Vehicle Bracket	5B:C
AX397	11 lb Halotron I w/ Wall Hanger	1A:10B:C
AX398	15.5 lb Halotron I w/ Wall Hanger	2A:10B:C
DDPAX891	80 lb Bulk Halotron I Cylinder	
DDPAX892	200 lb Bulk Halotron I Cylinder	

**Amerex® HALON 1211 FIRE EXTINGUISHERS** feature solid-steel cylinders with all-metal valves and use all-recycled gas, in accordance with the Montreal Protocol. Halon 1211 is a liquefied gas pressurized with nitrogen, which discharges as a vapor, causing no cold or static shock and no impairment of the operator's vision. This clean agent quickly penetrates difficult-to-see and hard-to-reach areas and leaves no residue. USCG approved with bracket listed on the UL label, except for models **DDPAX344T** and **DDPAX344TC**.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
DDPAX344T	2.75 lb	10"	3 3/8"	2 5/8"	—
DDPAX344TC	2.75 lb	10"	3 3/8"	2 5/8"	—
AX352TS	5.5 lb	14 3/8"	4 1/2"	3"	—
DDPAX352TSC	5.5 lb	14 3/8"	4 1/2"	3"	—
DDPAX355T	9.75 lb	15 1/4"	5 3/4"	4 1/4"	5DC
DDPAX369	16.75 lb	16 1/4"	8 1/2"	5"	5HB
DDPAX371	22 lb	20 1/4"	8 1/2"	5"	5HB
DDPAX361	36.25 lb	24"	9 3/4"	7"	15HB

P/N	DESCRIPTION	UL RATING
DDPAX344T	1.25 lb Halon w/ Vehicle Bracket	2B:C
DDPAX344TC	1.25 lb Chrome Halon w/ Vehicle Bracket	2B:C
AX352TS	2.5 lb Halon w/ Strap Bracket	5B:C
DDPAX352TSC	2.5 lb Chrome Halon w/ Strap Bracket	5B:C
DDPAX355T	5 lb Halon w/ Vehicle Bracket	10B:C
DDPAX369	9 lb Halon w/ Brass Valve & Wall Hanger	1A:10B:C
DDPAX371	13 lb Halon w/ Brass Valve & Wall Hanger	2A:40B:C
DDPAX361	17 lb Halon w/ Brass Valve & Wall Hanger	4A:80B:C

**Amerex® CARBON DIOXIDE (CO<sub>2</sub>) PORTABLE FIRE EXTINGUISHERS** effectively fight Class B flammable liquid fires and are electrically non-conductive with a clean, non-contaminating, and odorless gas. They are perfectly safe for use on clothing, equipment, valuable documents, and food. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N	UL RATING
AX322	13.1 lb	17 <sup>3</sup> / <sub>4</sub> "	8 <sup>1</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB	5B:C
AX322NM	13.1 lb	17 <sup>3</sup> / <sub>4</sub> "	8 <sup>1</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>4</sub> "	-	5B:C
AX330	28.25 lb	24"	12"	7"	15HB	10B:C
AX331	37.75 lb	30"	12"	7"	15HB	10B:C
AX332	50.75 lb	30"	13"	8"	20HB	10B:C

P/N	DESCRIPTION	UL RATING
AX322	5 lb CO <sub>2</sub> w/ Wall Hanger	5B:C
AX322NM	5 lb Non-Magnetic CO <sub>2</sub> w/ Wall Hanger	5B:C
AX330	10 lb CO <sub>2</sub> w/ Wall Hanger	10B:C
AX331	15 lb CO <sub>2</sub> w/ Wall Hanger	10B:C
AX332	20 lb CO <sub>2</sub> w/ Wall Hanger	10B:C



AX322



AX322NM

**Amerex® HIGH-PERFORMANCE DRY CHEMICAL FIRE EXTINGUISHERS** feature superior vertical and horizontal range with a high 240 psi operating pressure. Select **Fast Flow** models offer high flow rates, fast discharge, quicker knockdown, and increased operator protection. Select **Compliance Flow** models offer longer range and higher UL ratings. Cylinders are made of painted galvanized drawn steel with protective rubber foot rings and feature all-metal valve construction and gauge guards. Extinguishers come with a standard wall bracket and a 12-year warranty. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N	UL RATING
DDPAX594	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	2A:40B:C
AX581	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	4A:40B:C
AX567	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB	4A:40B:C
DDPAX592	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	4A:80B:C
AX564	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	10A:120B:C
AX589	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB	10A:160B:C
DDPAX582	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	40B:C
DDPAX568	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB	40B:C
DDPAX595	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	40B:C
AX580	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	40B:C
DDPAX584	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	20B:C
AX569	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB	40B:C
DDPAX599	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	80B:C
DDPAX566	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB	120B:C
AX591	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB	160B:C

P/N	DESCRIPTION	UL RATING
DDPAX594	13.2 lb ABC Fast Flow	2A:40B:C
AX581	20 lb ABC Fast Flow	4A:40B:C
AX567	30 lb ABC Fast Flow	4A:40B:C
DDPAX592	13.2 lb ABC Compliance Flow	4A:80B:C
AX564	20 lb ABC Compliance Flow	10A:120B:C
AX589	30 lb ABC Compliance Flow	10A:160B:C
DDPAX582	20 lb BC Fast Flow	40B:C
DDPAX568	30 lb BC Fast Flow	40B:C
DDPAX595	13.2 lb PK Fast Flow	40B:C
AX580	20 lb PK Fast Flow	40B:C
DDPAX584	20 lb PK Fast Flow	20B:C
AX569	30 lb PK Fast Flow	40B:C
DDPAX599	13.2 lb PK Compliance Flow	80B:C
DDPAX566	20 lb PK Compliance Flow	120B:C
AX591	30 lb PK Compliance Flow	160B:C



DDPAX599, DDPAX568, AX567

## Designed For The Harshest Environments



AX792



AX791



AX713



AX724



AX723



AX716

### Amerex® Z-Series™ HIGH-PERFORMANCE

**EXTINGUISHERS** offer an exclusive paint process, fewer moving parts, and simple designs for the ultimate in corrosion resistance with minimal repair and maintenance costs. Available in **Fast Flow** and **Compliance Flow**, they offer superior fire protection with excellent reliability. 12-year warranty. Wall brackets included.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX790	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX791	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX792	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB
AX713	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX714	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX715	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB
AX723	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX724	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB
AX793	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX794	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX795	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX796	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB
AX716	31 lb	17 <sup>1</sup> / <sub>2</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX717	43 lb	24 <sup>3</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>2</sub> "	7"	15HB
AX718	58 lb	26 <sup>1</sup> / <sub>2</sub> "	11"	8"	20HB

P/N	DESCRIPTION	UL RATING
→AX790	13.2 lb ABC Fast Flow	2A:40:BC
→AX791	20 lb ABC Fast Flow	4A:40B:C
→AX792	30 lb ABC Fast Flow	4A:40B:C
→AX713	13.2 lb ABC Compliance Flow	4A:80B:C
→AX714	20 lb ABC Compliance Flow	10A:120B:C
→AX715	30 lb ABC Compliance Flow	10A:160B:C
→AX723	20 lb BC Fast Flow	40B:C
→AX724	30 lb BC Fast Flow	40B:C
→AX793	13.2 lb PK Fast Flow	40B:C
→AX794	20 lb PK Fast Flow	40B:C
→AX795	20 lb PK Fast Flow	20B:C
→AX796	30 lb PK Fast Flow	40B:C
→AX716	13.2 lb PK Compliance Flow	80B:C
→AX717	20 lb PK Compliance Flow	120B:C
→AX718	30 lb PK Compliance Flow	160B:C



AX570



RP257

Designed ideally for use on combustible metal fires, **Amerex®**

### CLASS D DRY POWDER FIRE EXTINGUISHERS

are fitted with a "soft-flow" extension applicator to keep operators away from extreme heat and toxic fumes caused by burning material.

The applicator can be quickly removed (to provide a straight stream of chemical) when greater range, a narrow discharge pattern, or a lobbing effect is required. Comes with a special corrosion-resistant yellow (Class D) color-coded paint finish. FM approved.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX570	53 lb	35"	13"	8"	20HB
DDPAX571	53 lb	35"	13"	8"	20HB

P/N	DESCRIPTION
AX570	30 lb Sodium Chloride w/ Wall Hanger
DDPAX571	30 lb Copper w/ Wall Hanger

P/N	DESCRIPTION
RP257	Class D Sign, "For Use On Combustible Metals Only", 7" x 10"

**Amerex® Class K “Kitchen Use” WET CHEMICAL FIRE EXTINGUISHERS** contain a special potassium acetate based low-pH agent, developed for use with pre-engineered restaurant kitchen systems (included in NFPA 10). Units come fully charged. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N	UL RATING
AX260	22.5 lb	19"	9"	7"	15HB	2A:K
DDPAX260CG	22.5 lb	19"	9"	7"	AX810CG	2A:K
AX262	33.5 lb	24½"	9"	7"	15HB	2A:K
DDPAX262CG	33.5 lb	24½"	9"	7"	AX810CG	2A:K

P/N	DESCRIPTION	UL RATING
AX260	6 L Wet Chem w/ Wall Hanger	2A:K
DDPAX260CG	6 L Wet Chem w/ Wall Hanger (USCG Approved)	2A:K
AX262	2.5 gal Wet Chem w/ Wall Hanger	2A:K
DDPAX262CG	2.5 gal Wet Chem w/ Wall Hanger (USCG Approved)	2A:K
AX5302	Recharge, 6 L Wet Chem, Pkg/2 For AX260	
AX660	Recharge, 2.5 gal Wet Chem, Pkg/2 For AX262	
BL189	K-Class “Fire Extinguisher” Arrow Sign, 8" x 12"	
AX810CG	Amerex Heavy-Duty Bracket (Galvanized)	



AX260, AX262

**Amerex’s STORED PRESSURE WATER FIRE EXTINGUISHER** utilizes the cooling, soaking, and penetrating effect of a 45’–55’ stream of water. For use on Class A fires. **Amerex® FOAM FIRE EXTINGUISHERS** are for Class A and B fires and offer easy, effective application, thanks to their air-aspirated nozzles. Ideal for emergency first response vehicles.

NOTE: Units ship empty.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N	UL RATING
AX240	7.5 lb	24½"	9"	7"	15HB	2A
AX250	11 lb	24½"	9"	7"	15HB	3A:20B
AX254	7.5 lb	19"	8"	7"	15HB	2A:10B

P/N	DESCRIPTION	UL RATING
AX240	2.5 gal Water w/ Wall Hanger	2A
AX250	2.5 gal AFFF w/ Wall Hanger	3A:20B
AX254	6 L AFFF w/ Wall Hanger	2A:10B
AX506B2	Antifreeze Charge, Pkg/2 For 2.5 gal Loaded Stream Extinguishers, Model 240	
AX502AR	23 oz AR-AFFF Premix Charge For 2.5 gal & 6 L Extg, Models 250, 252, 254, 250CG	



AX240

The **Amerex® AFFF PORTABLE FOAM FIRE EXTINGUISHER** is for use on Class A and Class B fires. Features easy and effective application using the hose and air-aspirating nozzle. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N	UL RATING
AX250CG	11 lb	24½"	9"	7"	AX810CG	3A:20B

P/N	DESCRIPTION	UL RATING
AX250CG	2.5 gal AFFF w/ Wall Hanger	3A:20B
AX810CG	Amerex Heavy-Duty Bracket (Galvanized)	
AX502AR	23 oz AR-AFFF Premix Charge For 2.5 gal & 6 L Extg, Models 250, 252, 254, 250CG	



AX250CG

# 1 FIRE EXTINGUISHERS & CHEMICAL



AX270NM, AX272NM

## Amerex® NON-MAGNETIC STORED PRESSURE DE-IONIZED WATER MIST FIRE EXTINGUISHERS

are the ultimate for Class A fires where potential Class C (electrical) hazards exist. The fine spray produced from their unique misting nozzle provides protection against electrical shock, greatly enhances the cooling and soaking characteristics of the agent, and reduces scattering of burning materials. Perfect for hospital environments, telecommunication facilities, and "clean room" manufacturing facilities.

NOTE: Units ship empty.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX270NM	7 lb	24 <sup>1</sup> / <sub>2</sub> "	11"	7"	15HB
AX272NM	8 lb	27 <sup>1</sup> / <sub>2</sub> "	11"	7"	15HB

P/N	DESCRIPTION	UL RATING
AX270NM	1.75 gal De-Ionized Water w/ Wall Hanger	2A:C
AX272NM	2.5 gal De-Ionized Water w/ Wall Hanger	2A:C
AX6702	1.75 gal De-Ionized Water Charge, Pkg/2	
AX6712	2.5 gal De-Ionized Water Charge, Pkg/2	



859A

Amerex's **HEAVY-DUTY DOLLY CART** moves larger, heavier extinguishers with ease. Fits cylinders 7"-8" in diameter.

P/N	DESCRIPTION
859A	Heavy-Duty Dolly Cart



DDPAX467

## Amerex® REGULATED PRESSURE WHEELED FIRE EXTINGUISHERS

feature a 110 cu ft nitrogen cylinder with a pressure regulator and 16" semi-pneumatic rubber tires. Their traditional design allows for adequate pressure to ensure a smooth, complete discharge of the dry chemical with a pressure reserve for blowing down the discharge hose. Easy to transport and operate by one person. USCG approved. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX467	404 lb	52"	26"	38"
DDPAX469	404 lb	52"	26"	38"
DDPAX468	429 lb	52"	26"	38"

P/N	DESCRIPTION	UL RATING
DDPAX467	125 lb Regulated Pressure ABC	30A:240B:C
DDPAX469	125 lb Regulated Pressure PK	320B:C
DDPAX468	150 lb Regulated Pressure BC	240B:C



**Amerex® REGULATED PRESSURE WHEELED FIRE EXTINGUISHERS** feature a 110 cu ft nitrogen cylinder with a pressure regulator and 2½" x 36" steel wheels. This traditional design allows for adequate pressure to ensure a smooth, complete discharge of the dry chemical with a pressure reserve for blowing down the discharge hose. Easy to transport and operate by one person. USCG approved. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX470	432 lb	52"	28"	45"
DDPAX472	432 lb	52"	28"	45"
DDPAX471	457 lb	52"	28"	45"

P/N	DESCRIPTION	UL RATING
DDPAX470	125 lb Regulated Pressure ABC	30A:240B:C
DDPAX472	125 lb Regulated Pressure PK	320B:C
DDPAX471	150 lb Regulated Pressure BC	240B:C



DDPAX472

**Amerex® DIRECT PRESSURE WHEELED FIRE EXTINGUISHERS** utilize a 23 cu ft nitrogen cylinder on 125 lb and 150 lb units and a 55 cu ft nitrogen cylinder on 300 lb and 350 lb units with a "quick opening valve" to pressurize and completely discharge the agent cylinder. The 125 lb and 150 lb units have 16" semi-pneumatic tires. The 300 lb and 350 lb units have 6" x 36" steel wheels. Both allow for easy maneuvering and operation by one person. All units are fitted with a 4" stainless steel fill opening and brass cap for easy servicing. USCG approved. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
AX450	335 lb	45"	24"	36"
DDPAX451	360 lb	45"	24"	36"
AX452	335 lb	45"	24"	36"
DDPAX491	743 lb	57"	34"	39"
DDPAX492	793 lb	57"	34"	39"
AX493	743 lb	57"	34"	39"

P/N	DESCRIPTION	UL RATING
AX450	125 lb Direct Pressure ABC	30A:240B:C
DDPAX451	150 lb Direct Pressure BC	240B:C
AX452	125 lb Direct Pressure PK	320B:C
DDPAX491	300 lb Direct Pressure ABC	40A:320B:C
DDPAX492	350 lb Direct Pressure BC	320B:C
AX493	300 lb Direct Pressure PK	320B:C



AX452



DDPAX491

# 1 FIRE EXTINGUISHERS & CHEMICAL



AX488

## Amerex® STORED PRESSURE WHEELED FIRE

**EXTINGUISHERS** feature cage-type protection for the agent cylinder and a balanced platform for transportation and operation. The narrow width and semi-pneumatic rubber tires allow for single-person operation in confined areas. Chemical and pressure are sealed in the agent cylinder. USCG approved. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
AX495	174 lb	46"	21½"	24"
DDPAX496	174 lb	46"	21½"	24"
DDPAX497	174 lb	46"	21½"	24"
AX488	344 lb	53½"	28"	40"
DDPAX490	344 lb	53½"	28"	40"
DDPAX489	369 lb	53½"	28"	40"

P/N	DESCRIPTION	UL RATING
AX495	50 lb Stored Pressure ABC	20A:160B:C
DDPAX496	50 lb Stored Pressure BC	160B:C
DDPAX497	50 lb Stored Pressure PK	160B:C
AX488	125 lb Stored Pressure ABC	30A:240B:C
DDPAX490	125 lb Stored Pressure PK	320B:C
DDPAX489	150 lb Stored Pressure BC	240B:C



→ NEW

DDPAX759

→ **More STORED PRESSURE WHEELED FIRE EXTINGUISHERS Available - Call for Pricing.**

## Amerex® Z-Series™ HIGH-PERFORMANCE

**WHEELED EXTINGUISHERS** offer an exclusive paint process, fewer moving parts, and simple designs for the ultimate in corrosion resistance with minimal repair and maintenance costs. Plus 350 psi operating pressures offer exceptional range and flow rates. Other features include integral lift loops, chrome-plated brass shutoff ball valve with swivel pistol grip, 1" x 50' field-repairable hose, and a wide-footprint wheels (36" x 6"). Meets CAN/ULC S504 and S508 and ANSI/UL 299 and 711.

Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX759	352 lb	53½"	34"	38½"
DDPAX756	775 lb	60"	37"	44"
DDPAX757	775 lb	60"	37"	44"
DDPAX758	775 lb	60"	37"	44"
DDPAX758R	775 lb	60"	37"	44"

P/N	DESCRIPTION	UL RATING
→ DDPAX759	125 lb High Performance PK	120B:C
→ DDPAX756	250 lb High Performance ABC	40A:160B:C
→ DDPAX757	250 lb High Performance BC	160B:C
→ DDPAX758	250 lb High Performance PK	160B:C
→ DDPAX758R	250 lb High Performance Fast Flow PK	160B:C



→ NEW

DDPAX758R

**Amerex® WHEELED HALOTRON® I FIRE EXTINGUISHERS** feature the same qualities found in all **Amerex®** products and add the convenience of a clean extinguishing agent with a low GWP (Global Warming Potential) and a low ODP (Ozone Depletion Potential). **Halotron I** has a short atmospheric lifetime, and each unit maximizes agent visibility during discharge. There is no thermal shock, static shock, or electrical conductivity back to the operator. EPA approved clean agent for Class A, B, and C hazards as well as FAA approved for both ramp use (ARFF vehicle) and on-board an aircraft. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX673	286 lb	58"	28"	39"
DDPAX674	512 lb	64"	30"	42"
DDPAX675	610 lb	64"	37"	43"

P/N	DESCRIPTION	UL RATING
DDPAX673	65 lb Halotron I w/ Semi-Pneumatic Wheels	4A:80B:C
DDPAX674	150 lb Halotron I w/ Semi-Pneumatic Wheels	10A:120B:C
DDPAX675	150 lb Halotron I w/ Steel Wheels	10A:120B:C



**Amerex's AR-AFFF WHEELED FIRE EXTINGUISHER** contains a premixed alcohol-resistant foam that is highly effective on Class B fuel fires and a penetrating/wetting agent on fires involving Class A materials. Unit features quality hardware throughout, including a unique agent cylinder, fabricated entirely of stainless steel—no interior coatings are necessary. Meets NFPA requirements for hospital helicopter pad protection. USCG approved. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX630	390 lb	57"	34"	39"

P/N	DESCRIPTION	UL RATING
DDPAX630	33 gal Direct Pressure AR-AFFF	20A:160B
DDPAX534	2 gal AR-AFFF Recharge For Model 630	



# 1 FIRE EXTINGUISHERS & CHEMICAL



DDPAX680

## Amerex® CLASS D WHEELED FIRE EXTINGUISHERS

are ideal for large combustible metal fires. They are well balanced for quick transport, thanks to 36" non-sparking rubber-treaded steel wheels. Both extinguishers are pressurized with argon and regulated to a low 125 psi (to avoid disrupting the burning materials). FM approved. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX680	444 lb	52"	28"	45"
DDPAX681	544 lb	52"	28"	45"

P/N	DESCRIPTION
DDPAX680	150 lb Regulated Pressure (Sodium Chloride)
DDPAX681	250 lb Regulated Pressure (Copper Powder)



AX333

## Amerex® CARBON DIOXIDE (CO<sub>2</sub>) WHEELED FIRE EXTINGUISHERS

are easy to operate with "quick opening" T-handle valves and horn-mounted shutoff valves. A logical choice where a Class B:C non-contaminating agent is required or where hand portable protection or the number of personnel would not be adequate. USCG approved. Call your Account Manager for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
AX333	257 lb	47"	23"	48"
AX334	461 lb	47"	23"	48"

P/N	DESCRIPTION	UL RATING
AX333	50 lb CO <sub>2</sub>	20B:C
AX334	100 lb CO <sub>2</sub>	20B:C



AX334

**NOTE:** All prices quoted are FOB factory unless shipped from stock. All nitrogen cylinder operated wheeled extinguishers are shipped with the "DRY CHEMICAL" agent in pails. Most wheeled units are available in a stationary configuration. Inquire about special quantity pricing.

# Square Thread Design Means Faster Valve Removal

## Badger™ ADVANTAGE MULTI-PURPOSE FIRE

**EXTINGUISHERS** are made to handle easier and be recharged quicker, thanks to a larger neck opening. The square thread design allows the valve to be removed and installed quickly. Heavy-duty plated steel siphon tubes are threaded for a more secure connection, and the polymer hose strap will not scratch the cylinder. Larger pull pins and handles are easy to operate—even with work gloves.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
21007865B	5 lb	15"	5 1/2"	3 1/4"	-
21007866B	9.5 lb	16 7/16"	7 1/2"	4 1/2"	5DC
21008936B	9.5 lb	16 7/16"	7 1/2"	4 1/2"	5DC
21007867B	17.5 lb	19 5/8"	8"	5 1/4"	5HB
21007868B	31.5 lb	21 1 1/16"	9"	7 1/2"	15HBL

P/N	DESCRIPTION	UL RATING
21007865B	2.5 lb Advantage w/ Vehicle Bracket	1A:10B:C
21007866B	5 lb Advantage w/ Wall Hook	3A:40B:C
21008936B	5 lb Advantage w/ Vehicle Bracket	3A:40B:C
21007867B	10 lb Advantage w/ Wall Hook	4A:60B:C
21007868B	20 lb Advantage w/ Wall Hook	6A:80B:C



## BADGER™ FIRE EXTINGUISHERS

Badger™ **STANDARD** (aluminum valve) and **EXTRA** (brass valve) **MULTI-PURPOSE FIRE EXTINGUISHERS** tackle the majority of fire risks found in most commercial, industrial and domestic environments. They are suitable for use on class A, B, and C fires and mount on any surface with the wall hook supplied or, if preferred, they can be supplied with an optional vehicle bracket. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
22430B	5.4 lb	14 7/8"	5 1/2"	3"	-
22435B	10 lb	15 1/4"	7 1/4"	4 1/4"	5DC
22486B	10 lb	15 1/4"	7 1/4"	4 1/4"	5DC
22603B	17 lb	18 5/16"	7 3/4"	5 1/4"	5HB
22682B	33 lb	21 1/8"	9 1/4"	7 1/4"	15HBL
23384B	5.8 lb	14 7/8"	5 1/2"	3"	-
23390B	10.4 lb	15 1/4"	7 1/2"	4 1/4"	5DC
23463B	10.4 lb	15 1/4"	7 1/4"	4 1/4"	5DC
23396B	18 lb	18 5/16"	7 3/4"	5 1/4"	5HB
23497B	33 lb	21 1/8"	9 1/4"	7 1/4"	15HBL

P/N	DESCRIPTION	UL RATING
22430B	Standard 2.5 lb ABC w/ Aluminum Valve & Vehicle Bracket	1A:10B:C
22435B	Standard 5 lb ABC w/ Aluminum Valve & Wall Hook	3A:40B:C
22486B	Standard 5 lb ABC w/ Aluminum Valve & Vehicle Bracket	3A:40B:C
22603B	Standard 10 lb ABC w/ Aluminum Valve & Wall Hook	4A:80B:C
22682B	Standard 20 lb ABC w/ Aluminum Valve & Wall Hook	6A:120B:C

P/N	DESCRIPTION	UL RATING
23384B	Extra 2.5 lb ABC w/ Brass Valve & Vehicle Bracket	1A:10B:C
23390B	Extra 5 lb ABC w/ Brass Valve & Wall Hook	3A:40B:C
23463B	Extra 5 lb ABC w/ Brass Valve & Vehicle Bracket	3A:40B:C
23396B	Extra 10 lb ABC w/ Brass Valve & Wall Hook	4A:80B:C
23497B	Extra 20 lb ABC w/ Brass Valve & Wall Hook	6A:120B:C



# 1 FIRE EXTINGUISHERS & CHEMICAL



23476B

**Badger™ EXTRA REGULAR DRY CHEMICAL STORED PRESSURE FIRE EXTINGUISHERS** are specifically designed to meet the needs of industrial and commercial premises where there is a flammable liquid risk. Suitable for use on Class B and C fires, they are cost effective to maintain, offer good value and excellent performance, and mount on any surface with a wall hook, forked hanger, or an optional vehicle bracket. Brass valves standard. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
23471B	5.4 lb	14 <sup>7</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>2</sub> "	3"	-
23476B	10.4 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
23781B	18 lb	19 <sup>1</sup> / <sub>8</sub> "	8 <sup>1</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
23482B	33 lb	21 <sup>1</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL

P/N	DESCRIPTION	UL RATING
23471B	2.75 lb BC w/ Vehicle Bracket	10B:C
23476B	5.5 lb BC w/ Wall Hook	40B:C
23781B	10 lb BC w/ Wall Hook	60B:C
23482B	20 lb BC w/ Wall Hook	120B:C



23488B



23778B

**Badger™ EXTRA PURPLE K DRY CHEMICAL STORED PRESSURE FIRE EXTINGUISHERS** are designed for use on high-hazard types of Class B and C fires and come with brass valves. Purple K is generally superior to other dry chemicals on Class B fires, making these extinguishers ideal for use on industrial and commercial premises where flammable liquid or gas fire risks exist. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
23485B	5.8 lb	14 <sup>7</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>2</sub> "	3"	-
23488B	10.4 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
23778B	17 lb	18 <sup>7</sup> / <sub>8</sub> "	7 <sup>3</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
23495B	32 lb	21 <sup>1</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL

P/N	DESCRIPTION	UL RATING
23485B	2.5 lb PK w/ Vehicle Bracket	10B:C
23488B	5 lb PK w/ Wall Hook	30B:C
23778B	10 lb PK w/ Wall Hook	80B:C
23495B	20 lb PK w/ Wall Hook	120B:C

Offering the ultimate protection against Class B hazards,

**Badger™ EXTRA HIGH FLOW DRY CHEMICAL FIRE EXTINGUISHERS** feature a steel cylinder, internal siphon tube, and heavy-duty, chrome-plated brass valve. These models, available in ABC and Purple K, have dry chemical agent discharge rates exceeding the minimum one-pound-per-second recommendation of NFPA for pressure, three dimensional, and obstacle fires. USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
21006158B	18 lb	19 <sup>1</sup> / <sub>8</sub> "	8 <sup>1</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
21006160B	33 lb	21 <sup>1</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL
21006159B	18 lb	19 <sup>1</sup> / <sub>8</sub> "	8 <sup>1</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
21006161B	33 lb	21 <sup>1</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL

P/N	DESCRIPTION	UL RATING
21006158B	10 lb ABC w/ Wall Hook	1A:20B:C
21006160B	20 lb ABC w/ Wall Hook	4A:60B:C
21006159B	10 lb PK w/ Wall Hook	20B:C
21006161B	20 lb PK w/ Wall Hook	60B:C



21006158B

**Badger™ EXTRA HALOTRON® I FIRE EXTINGUISHERS**

are an environmentally acceptable Halon alternative and designed to meet any special hazard where Halon 1211 was specified and used. **Halotron I** is ideal for protecting office computer areas, data storage, telecommunications, and high-tech clean rooms.

**Halotron I** is the government specified clean agent alternative and is USCG approved with the bracket listed on the UL label, except for model **24563B**. Equipped with brass valves.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
24563B	6.9 lb	14 <sup>7</sup> / <sub>8</sub> "	6 <sup>1</sup> / <sub>8</sub> "	3"	-
24567B	10.6 lb	15 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
23082B	23 lb	16 <sup>3</sup> / <sub>16</sub> "	8 <sup>3</sup> / <sub>8</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL
23097B	26.5 lb	17 <sup>1</sup> / <sub>8</sub> "	8 <sup>3</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL

P/N	DESCRIPTION	UL RATING
24563B	2.5 lb Halotron I w/ Vehicle Bracket	2B:C
24567B	5 lb Halotron I w/ Wall Hook	5B:C
23082B	11 lb Halotron I w/ Wall Hook	1A:10B:C
23097B	15.5 lb Halotron I w/ Wall Hook	2A:10B:C



**Badger™ EXTRA CARBON DIOXIDE (CO<sub>2</sub>) FIRE EXTINGUISHERS** offer fast, safe, and effective protection against fires involving electrical equipment and flammable liquids.

They are generally suited for use indoors, making them ideal for today's office environments. The cylinders are manufactured from lightweight, high-grade aluminum with brass valves. They are highly effective, easy to use, and leave no messy residue to clean up. USCG approved with bracket listed on the UL label, except for **25078B**.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
21111B	15 lb	17"	8 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
21106B	30 lb	19 <sup>5</sup> / <sub>16</sub> "	10 <sup>15</sup> / <sub>16</sub> "	6 <sup>15</sup> / <sub>16</sub> "	15HB
21103B	40 lb	26"	10 <sup>15</sup> / <sub>16</sub> "	6 <sup>15</sup> / <sub>16</sub> "	15HB
21096B	51 lb	26"	12"	8"	20HB
25078B	15 lb	17"	8 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>4</sub> "	-

P/N	DESCRIPTION	UL RATING
21111B	5 lb CO <sub>2</sub> w/ Wall Hook	5B:C
21106B	10 lb CO <sub>2</sub> w/ Wall Hook	10B:C
21103B	15 lb CO <sub>2</sub> w/ Wall Hook	10B:C
21096B	20 lb CO <sub>2</sub> w/ Wall Hook	10B:C
25078B	5 lb CO <sub>2</sub> w/ Non-Magnetic Bracket	5B:C



**Badger™ EXTRA UNIVERSAL ULTRA AR-AFFF FOAM FIRE EXTINGUISHER** is effective on Class A common combustibles as well as both hydrocarbon and polar solvent types of Class B flammable liquids, so it eliminates the application guesswork associated with other foams.

The unique synthetic base of **Universal Ultra AR-AFFF Foam** does not have any offensive odors, is non-toxic, environmentally friendly, biodegradable, and extremely simple to use and clean up. Brass valve standard.

NOTE: Unit ships empty.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
23697B	12 lb	24 <sup>1</sup> / <sub>2</sub> "	8 <sup>3</sup> / <sub>4</sub> "	7"	15HB

P/N	DESCRIPTION	UL RATING
23697B	2.5 gal Foam w/ Wall Hook	1A:30B
23691B	6 L Recharge	
23702B	2.5 gal Recharge	



# 1 FIRE EXTINGUISHERS & CHEMICAL



25064B

The firefighting power and user-friendly design of **Badger™ EXTRA CLASS K PORTABLE FIRE EXTINGUISHERS** make them the ideal choice for commercial restaurant applications. These stored pressure extinguishers have been designed to offer the very best portable fire protection available in supplementing pre-engineered restaurant suppression systems. Units come with brass valves.

NOTE: 23171B ships empty.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
25064B	15 lb	19 <sup>1</sup> / <sub>2</sub> "	8 <sup>3</sup> / <sub>4</sub> "	7"	15HB
23171B	19 lb	24 <sup>1</sup> / <sub>2</sub> "	8 <sup>3</sup> / <sub>4</sub> "	7"	15HB

P/N	DESCRIPTION	UL RATING
25064B	6 L Wet Chemical w/ Wall Hook	K
23171B	2.5 gal Wet Chemical w/Wall Hook	K
AC100	6 L Recharge Jug, Pkg/2	
AC250	2.5 gal Recharge	

## Badger™ EXTRA STORED PRESSURE WATER FIRE

**EXTINGUISHER** is ideal for common combustible materials, such as trash, wood, and paper. **Badger's** non-toxic, ozone-friendly pressurized water fire extinguisher is an excellent choice for virtually all Class A-type hazards. Brass valve standard.

NOTE: Unit ships empty.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
16888B	8 lb	24 <sup>3</sup> / <sub>4</sub> "	8 <sup>3</sup> / <sub>4</sub> "	7"	15HB

P/N	DESCRIPTION	UL RATING
16888B	2.5 gal Water w/ Wall Hook	2A
792B	WP-61 Antifreeze Charge	



16888B



DDP466521B

## Badger™ BRIGADE CARBON DIOXIDE (CO<sub>2</sub>) CARTRIDGE OPERATED FIRE EXTINGUISHERS

are the industry's most effective fire extinguishers of their kind. Available in ABC, BC, or Purple K, these units use carbon dioxide expellent gas and feature deep-drawn seamless steel construction with corrosion-resistant cylinders for maximum performance. USCG approved with bracket listed on the UL label. For use down to -40°F.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY DUTY BRACKET P/N
DDP466521B	25.5 lb	18 <sup>1</sup> / <sub>4</sub> "	9 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>8</sub> "	466541B
DDP466523B	25.5 lb	18 <sup>1</sup> / <sub>4</sub> "	9 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>8</sub> "	466541B
466527B	45.5 lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>4</sub> "	466542B
DDP466564B	45.5 lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>4</sub> "	466542B
466528B	47.5 lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>4</sub> "	466542B
466529B	46.5 lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>4</sub> "	466542B
466533B	51 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>3</sup> / <sub>16</sub> "	466543B
466539B	55 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>3</sup> / <sub>16</sub> "	466543B
466534B	54.5 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>3</sup> / <sub>16</sub> "	466543B

P/N	DESCRIPTION	UL RATING
DDP466521B	10.65 lb ABC w/ Wall Hook	4A:40B:C
DDP466523B	10.5 lb PK w/ Wall Hook	60B:C
466527B	21 lb ABC w/ Wall Hook	10A:60B:C
DDP466564B	21 lb ABC High Flow w/ Wall Hook	2A:40B:C
466528B	23 lb BC w/ Wall Hook	60B:C
466529B	22 lb PK w/ Wall Hook	80B:C
466533B	25 lb ABC w/ Wall Hook	10A:80B:C
466539B	29 lb BC w/ Wall Hook	120B:C
466534B	28.5 lb PK w/ Wall Hook	120B:C



466527B



466533B



When high-hazard fires demand a fast one-person response and exceptional performance, look to **Badger™ WHEELED STORED PRESSURE DRY CHEMICAL FIRE EXTINGUISHERS** to make it possible. Their long-range discharge offers control over ordinarily out-of-reach fires, allowing the operator to keep a safe distance from the fire source and smoke. The 50 lb unit provides cost-effective, reliable fire protection. USCG approved. All feature brass valves.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH	UL RATING
20127B	140 lb	46 <sup>1</sup> / <sub>4</sub> "	23"	23"	20A:160B:C
20180B	140 lb	46 <sup>1</sup> / <sub>4</sub> "	23"	23"	160B:C
20653B	300 lb	58"	28"	39 <sup>1</sup> / <sub>4</sub> "	40A:240B:C
20684B	300 lb	58"	28"	39 <sup>1</sup> / <sub>4</sub> "	240B:C
DDP20677B	375 lb	58"	28"	39 <sup>1</sup> / <sub>4</sub> "	240B:C

P/N	DESCRIPTION	UL RATING
20127B	50 lb ABC	20A:160B:C
20180B	50 lb PK	160B:C
20653B	125 lb ABC	40A:240B:C
20684B	125 lb PK	240B:C
DDP20677B	150 lb BC	240B:C



20127B



20653B

**Badger™ WHEELED REGULATED RELEASE DRY CHEMICAL FIRE EXTINGUISHERS** are recommended for chemical or petroleum plants, storage facilities, airports, warehouses, construction sites, equipment depots, and other high-hazard locations where dry chemical is the preferred agent. With 16" semi-pneumatic wheels, these units are highly mobile, permitting a single operator to extinguish fires that would normally require several operators with large portables. Equipped with brass valves.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH	UL RATING
DDP19900B	435 lb	52"	27"	39"	40A:240B:C
DDP19906B	440 lb	52"	27"	39"	240B:C
DDP19915B	415 lb	52"	27"	45"	240B:C

P/N	DESCRIPTION	UL RATING
DDP19900B	145 lb ABC	40A:240B:C
DDP19906B	150 lb BC	240B:C
DDP19915B	125 lb PK	240B:C



DDP19906B

**Badger™ WHEELED CARBON DIOXIDE (CO<sub>2</sub>) EXTINGUISHERS** provide excellent protection for certain flammable liquids and energized electrical equipment. They can be operated by a single person, and the squeeze-grip control valve design allows for easy use. They are generally reserved for indoor use where wind and drafts will not disperse a discharge pattern. Carbon dioxide is a clean agent that leaves no residue. Equipped with brass valves.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH	UL RATING
DDP22724B	271 lb	52"	21 <sup>1</sup> / <sub>2</sub> "	33"	20B:C
DDP22725B	446 lb	52"	32"	33"	20B:C


P/N	DESCRIPTION	UL RATING
DDP22724B	50 lb CO <sub>2</sub>	20B:C
DDP22725B	100 lb CO <sub>2</sub>	20B:C



DDP22724B



DDP22725B

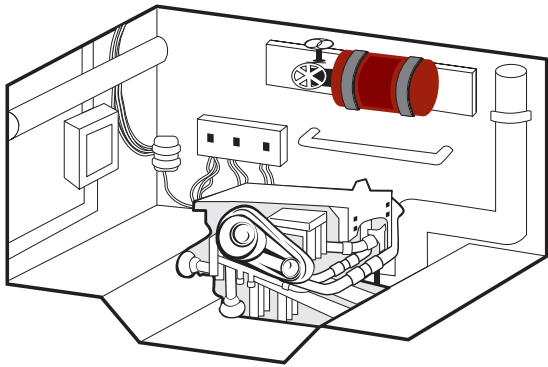

MOUNTED INSTALLATION



DDP25HFC227



DDP500HFC227

## FIREBOY® FIRE EXTINGUISHERS

### Fireboy® HFC-227 CLEAN AGENT FIRE

**EXTINGUISHER SYSTEMS** are the cleaner, safer, and more-effective alternative to dry chemical portable fire extinguishers.

They leave no residue or powdery mess behind and have a quicker fire-out time. When 175°F (79°C) is reached, the extinguisher will automatically discharge, releasing the clean agent gas to totally flood the entire space, smothering the fire. For occupied and unoccupied areas and most all marine applications. Approved for Class B fires.

P/N	DESCRIPTION	MAXIMUM VOLUME PROTECTED	SHELL DIAMETER	UNIT HEIGHT	SHIP WEIGHT
DDP25HFC227	HFC-227	25 cu ft	3.3"	9.5"	5 lb
DDP50HFC227	HFC-227	50 cu ft	3.3"	13.3"	8 lb
DDP75HFC227	HFC-227	75 cu ft	4.3"	15.6"	13 lb
DDP100HFC227	HFC-227	100 cu ft	4.3"	15.6"	14 lb
DDP125HFC227	HFC-227	125 cu ft	4.3"	15.6"	15 lb
DDP150HFC227	HFC-227	150 cu ft	5.1"	17.2"	20 lb
DDP175HFC227	HFC-227	175 cu ft	5.1"	17.2"	21 lb
DDP200HFC227	HFC-227	200 cu ft	5.1"	17.2"	22 lb
DDP225HFC227	HFC-227	225 cu ft	6.3"	17.3"	29 lb
DDP250HFC227	HFC-227	250 cu ft	6.3"	17.3"	30 lb
DDP275HFC227	HFC-227	275 cu ft	6.3"	17.3"	31 lb
DDP300HFC227	HFC-227	300 cu ft	6.3"	17.3"	32 lb
DDP325HFC227	HFC-227	325 cu ft	7.1"	17.2"	37 lb
DDP350HFC227	HFC-227	350 cu ft	7.1"	17.2"	38 lb
DDP375HFC227	HFC-227	375 cu ft	7.1"	17.2"	39 lb
DDP400HFC227	HFC-227	400 cu ft	7.1"	19.4"	43 lb
DDP450HFC227	HFC-227	450 cu ft	7.1"	19.4"	45 lb
DDP500HFC227	HFC-227	500 cu ft	7.1"	27.4"	55 lb
DDP550HFC227	HFC-227	550 cu ft	7.1"	27.4"	57 lb
DDP600HFC227	HFC-227	600 cu ft	7.1"	27.4"	60 lb
DDP650HFC227	HFC-227	650 cu ft	7.1"	27.4"	62 lb
DDP700HFC227	HFC-227	700 cu ft	7.1"	27.4"	64 lb
DDP750HFC227	HFC-227	750 cu ft	7.1"	33.3"	70 lb
DDP800HFC227	HFC-227	800 cu ft	7.1"	33.3"	73 lb
DDP850HFC227	HFC-227	850 cu ft	7.1"	33.3"	76 lb
DDP900HFC227	HFC-227	900 cu ft	7.1"	33.3"	77 lb
DDP950HFC227	HFC-227	950 cu ft	7.1"	33.3"	80 lb
DDP1000HFC227	HFC-227	1000 cu ft	10.0"	21.4"	93 lb
DDP1050HFC227	HFC-227	1050 cu ft	10.0"	21.4"	96 lb
DDP1100HFC227	HFC-227	1100 cu ft	10.0"	21.4"	99 lb
DDP1150HFC227	HFC-227	1150 cu ft	10.0"	27.5"	108 lb
DDP1200HFC227	HFC-227	1200 cu ft	10.0"	27.5"	111 lb
DDP1250HFC227	HFC-227	1250 cu ft	10.0"	27.5"	113 lb
DDP1300HFC227	HFC-227	1300 cu ft	10.0"	27.5"	116 lb
DDP1350HFC227	HFC-227	1350 cu ft	10.0"	27.5"	119 lb
DDP1400HFC227	HFC-227	1400 cu ft	10.0"	27.5"	121 lb
DDP1450HFC227	HFC-227	1450 cu ft	10.0"	27.5"	124 lb
DDP1500HFC227	HFC-227	1500 cu ft	10.0"	27.5"	126 lb

**Fireboy® PANEL WARNING LIGHT** features an attractive 2" round escutcheon plate with an adhesive back for easy panel mounting. The green warning lamp provides constant monitoring of the system, complying with USCG requirements for system approval.

P/N	DESCRIPTION
FBLKIT	Fire System Status Indicator Light w/ Panel

**Fireboy® FIRE EXTINGUISHING SYSTEMS CABLES** are for those who prefer the extra measure of control or for inspected vessels required to have them by USCG regulations. The normal mounting position of the manual discharge cable is at right angles to the panel for a straight-out pull.

P/N	DESCRIPTION
E42096	Manual Discharge Cable, 6'
E42098	Manual Discharge Cable, 8'
E420910	Manual Discharge Cable, 10'
E420912	Manual Discharge Cable, 12'
E420914	Manual Discharge Cable, 14'
E420916	Manual Discharge Cable, 16'
E420918	Manual Discharge Cable, 18'
E420920	Manual Discharge Cable, 20'
E420922	Manual Discharge Cable, 22'
DDPE420924	Manual Discharge Cable, 24'
E420926	Manual Discharge Cable, 26'
E420928	Manual Discharge Cable, 28'
E420930	Manual Discharge Cable, 30'

If fire breaks out aboard a diesel-powered vessel, continued operation may remove the agent, creating the possibility of re-ignition. But not with **Fireboy® AUTOMATIC SHUTDOWN SYSTEMS**—they respond automatically when a **Fireboy** system discharges. Available in three different model series, they can shut down up to eight different engines. All **Shutdown Systems** are solid state for greater reliability and come with an integrated alarm horn, charged/discharged lights, and an override switch for restart or control of auto shutdown.

P/N	DESCRIPTION
E5300001	Diesel Engine Shutdown, 12V, 3 Circuit
DDPES500001	Diesel Engine Shutdown, 12V, 5 Circuit
E5501501	Diesel Engine Shutdown w/ GM Engine Time Delay, 12V, 5 Circuit
DDPES800001	Diesel Engine Shutdown, 12V, 8 Circuit
DDPES8000012432	Diesel Engine Shutdown, 24/32V, 8 Circuit
DDPES801501	Diesel Engine Shutdown w/ GM Engine Time Delay, 12V, 8 Circuit



FBLKIT



E42096



AUTOMATIC SHUTDOWN SYSTEMS

# 1 FIRE EXTINGUISHERS & CHEMICAL



50ABCULC



50BCPAIL



AX555



A9336



K804904



AX5302



A430182



A423320



A79372



PC553176

## RECHARGE CHEMICAL

Our **UL CLASSIFIED UNIVERSAL DRY CHEMICAL** is ideal for use in many manufacturers' fire extinguishers, per NFPA 10. This dry chemical agent consists of a carefully controlled range of particle sizes blended with a flow-promoting and anti-caking chemical for smooth delivery. Each particle is silicone coated for optimum moisture repellency and minimum friction during discharge. 50 lb.

P/N	DESCRIPTION
50ABCULC	UL ABC Dry Chemical

Our **UNIVERSAL RECHARGE DRY CHEMICAL/POWDER** agents consist of a carefully controlled range of particle sizes of sodium bicarbonate or potassium bicarbonate, blended with a flow-promoting and anti-caking chemical. The agents are formulated and manufactured for both long discharge range and smooth, uninterrupted flow. Each particle is silicone coated to provide moisture repellency and minimum friction during discharge. 50 lb.

P/N	DESCRIPTION
50BCPAIL	BC Dry Chemical
50PKPAIL	PK Dry Chemical
50DPAIL	Class D Dry Powder (Sodium Chloride)

**OEM DRY CHEMICAL** available from select warehouses. Call your Account Manager for availability.

P/N	DESCRIPTION
AX555	Amerex "High Performance" ABC Dry Chemical, 45 lb
AX550	Amerex ABC Dry Chemical, 50 lb
AX512	Amerex BC Dry Chemical, 50 lb
A53080	Ansul Foray ABC Dry Chemical, 45 lb
A9336	Ansul Plus-Fifty C Dry Chemical, 50 lb
400014B	Badger Advantage ABC Dry Chemical, 50 lb
B18905	Badger ABC Dry Chemical, 50 lb
B18903	Badger BC Dry Chemical, 50 lb
24124B	Badger Class D Powder Recharge, 50 lb
18907B	Badger PK Dry Chemical, 50 lb
BK61000	Buckeye ABC Dry Chemical, 50 lb
BK61400	Buckeye BC Dry Chemical, 50 lb
K806411	Kidde ABC Dry Chemical, 50 lb
K804904	Kidde BC Dry Chemical, 50 lb

**OEM LIQUID CHEMICAL CHARGES** for a wide variety of water, foam, and K-Class portable fire extinguisher models.

P/N	DESCRIPTION
AX506B2	Amerex Antifreeze Charge, Pkg/2 For 2.5 gal Loaded Stream Extinguishers, Model 240
AX534	Amerex AR-AFFF Charge, 2 gal
AX5302	Amerex Recharge, Pkg/2 For AX260
AX660	Amerex Recharge, Pkg/2 For AX262
AX502AR	Amerex AR-AFFF Premix Charge, 23 oz For 6 L and 2.5 gal & Extg, Models 250, 252, 254, 250CG
A430182	Ansil PRX Liquid, 6 L For K-Guard (K01, K01-1)
A423320	Ansil PRX Liquid, 5 gal For K-Guard (K01, K01-1)
A79372	Ansulex Chemical Agent, 3 gal For K-Guard (K01-2)
792B	Badger Antifreeze Charge For WP-61
AC100	Badger Recharge, 6 L, Pkg/2 For WC100
AC250	Badger Recharge, 2.5 gal For WC250
BK600872	Buckeye Recharge, 6 L
PC553176	Pyro-Chem Wet Chemical, 6 L For KS6100

Ansil®, K-Guard®, Ansulex®, Foray®, Plus-Fifty®, and PRX® are registered marks of Tyco Fire Products LP.