

3

EMERGENCY RESPONSE PRODUCTS




TECHNICAL SUPPORT

noun

\`tək-ni-kel `sə-pōrt\

A range of services designed to assist customers with product help.

Pre-Folded For Pin Racks

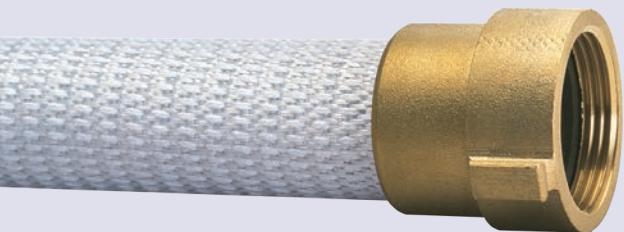


FT75NST

For emergency use only, **FireTech™ RACK & REEL FIRE HOSE** is fully lined, FM approved, and a great value. It has a proof test pressure of 500 psi, service test of 250 psi, and comes folded for easy installation on pin racks. Brass coupled only. Imported.

NOTE: Not intended for purposes of washdown!

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
FT50NST or NPSH	50' x 1 1/2" RR Hose	1 11/16"	7 lb
FT75NST or NPSH	75' x 1 1/2" RR Hose	1 11/16"	9 lb
FT100NST or NPSH	100' x 1 1/2" RR Hose	1 11/16"	12 lb

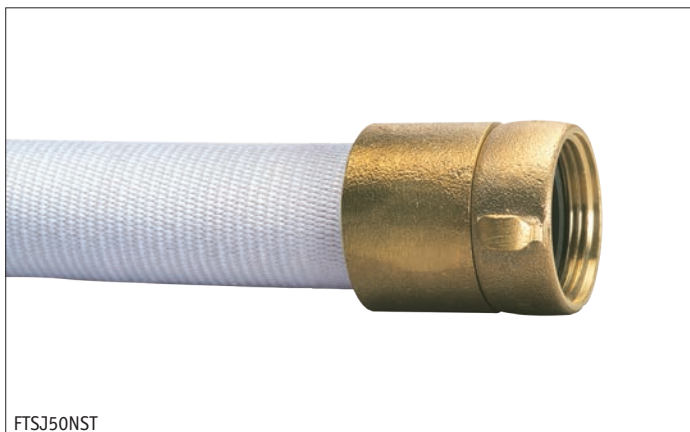


FTSJ50NST

FIRE HOSE

A step up from standard **Rack & Reel Fire Hose**, and a great value, **FireTech's SINGLE JACKET FIRE HOSE** has a proof test pressure of 500 psi and a service test of 250 psi. It is FM approved and made of 100% polyester rubber-lined material for extra strength and flexibility. Brass NST coupled. Imported.

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
FTSJ50NST	50' x 1 1/2" SJ Hose	1 13/16"	15 lb
FTSJ75NST	75' x 1 1/2" SJ Hose	1 13/16"	20 lb
FTSJ100NST	100' x 1 1/2" SJ Hose	1 13/16"	27 lb
FTSJ2550NST	50' x 2 1/2" SJ Hose	2 13/16"	27 lb

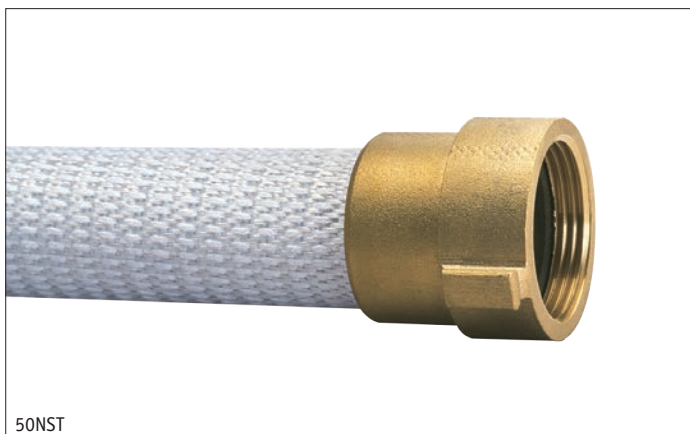


50NST

For emergency use only, this **RACK & REEL FIRE HOSE** is fully lined and FM approved. It has a proof test pressure of 500 psi, service test of 250 psi, and comes folded for easy installation on pin racks. Brass NST coupled.

NOTE: Not intended for purposes of washdown!

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
50NST	50' x 1 1/2" RR Hose	1 11/16"	7 lb
75NST	75' x 1 1/2" RR Hose	1 11/16"	9 lb
100NST	100' x 1 1/2" RR Hose	1 11/16"	12 lb

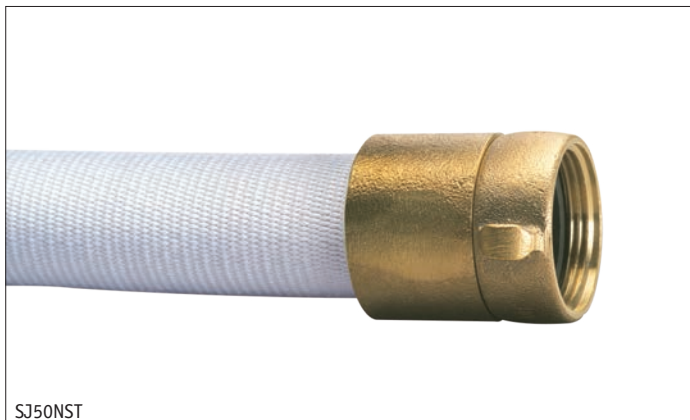

SJ50NST

This **SINGLE JACKET FIRE HOSE** has a proof test pressure of 500 psi and a service test of 250 psi. It features 100% polyester rubber-lined material for extra strength and flexibility. FM approved.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
SJ50NST OR NPSH	50' x 1 1/2" SJ Hose, Brass	1 13/16"	15 lb
SJ50ANST	50' x 1 1/2" SJ Hose, Alum	1 13/16"	13 lb
SJ75NST OR NPSH	75' x 1 1/2" SJ Hose, Brass	1 13/16"	20 lb
SJ75ANST	75' x 1 1/2" SJ Hose, Alum	1 13/16"	18 lb
SJ100NST OR NPSH	100' x 1 1/2" SJ Hose, Brass	1 13/16"	27 lb
SJ100ANST	100' x 1 1/2" SJ Hose, Alum	1 13/16"	25 lb
SJ2550NST OR NPSH	50' x 2 1/2" SJ Hose, Brass	2 13/16"	27 lb
SJ2550ANST	50' x 2 1/2" SJ Hose, Alum	2 13/16"	25 lb
SJ25100NST	100' x 2 1/2" SJ Hose, Brass	2 13/16"	51 lb

Pre-tested under UL supervision, this **UL LABELED SINGLE JACKET FIRE HOSE** features fully rubber lined 100% polyester construction. Every length carries the **UL®** mark and has a proof test pressure of 500 psi and a service test of 250 psi. Brass NST coupled. FM approved.

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
SJ50ULNST	50' x 1 1/2" UL Hose	1 13/16"	15 lb
SJ75ULNST	75' x 1 1/2" UL Hose	1 13/16"	20 lb
SJ100ULNST	100' x 1 1/2" UL Hose	1 13/16"	27 lb
SJ2550ULNST	50' x 2 1/2" UL Hose	2 13/16"	27 lb




SJ50ULNST

DOUBLE JACKET FIRE HOSE features two jackets of 100% polyester rubber-lined material for added protection against cuts, rips, and abrasion. It has a proof test pressure of 800 psi and a service test of 400 psi. Meets NFPA 1961. FM approved.

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
DJ50NST OR NPSH	50' x 1 1/2" DJ Hose, Brass	1 15/16"	20 lb
DJ50ANST	50' x 1 1/2" DJ Hose, Alum	1 15/16"	18 lb
DJ100NST	100' x 1 1/2" DJ Hose, Brass	1 15/16"	35 lb
DJ100ANST	100' x 1 1/2" DJ Hose, Alum	1 15/16"	32 lb
DJ2550NST	50' x 2 1/2" DJ Hose, Brass	3"	37 lb
DJ2550ANST	50' x 2 1/2" DJ Hose, Alum	3"	34 lb

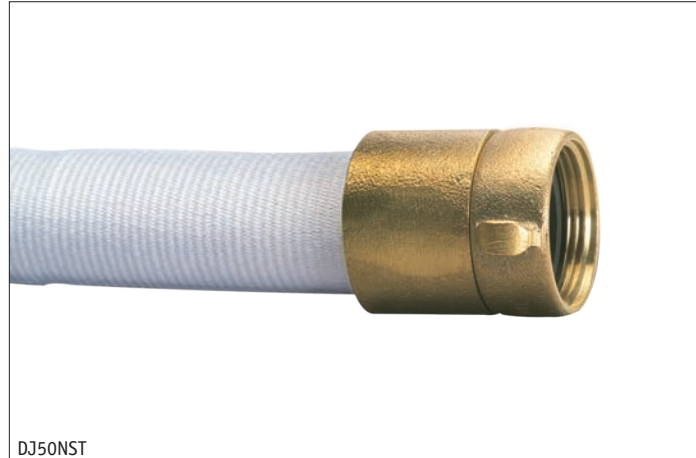

DJ50NST

This **YELLOW COATED FIRE HOSE** is constructed to the same specifications as the standard **Double Jacket Hose**. Every section of Coated Hose is independently and completely impregnated with an abrasion-resistant, water-repellent polymer for outstanding performance under tough conditions. Aluminum NST coupled. FM approved (except **DJ17550YHANST**).

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
DJ50YHANST	50' x 1 1/2" YC Hose	1 15/16"	21 lb
DJ17550YHANST	50' x 1 3/4" YC Hose	2 1/8"	25 lb
DJ2550YHANST	50' x 2 1/2" YC Hose	3"	39 lb




DJ50YHANST


RUBBER COVERED FIRE HOSE is the choice of professionals nationwide. Abrasion-resistant, it features a heat-free nitrile synthetic one-piece cover and liner that is impervious to water, oil, gas, and most chemicals. Lightweight, it is virtually kink-resistant for easy handling, and it never needs drying. It has a proof test pressure of 500 psi and a service test of 250 psi. Aluminum NST coupled. Meets NFPA 1961. Imported.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
RCH50ANST	50' x 1 1/2" RC Hose	1 3/4"	11.5 lb
RCH100ANST	100' x 1 1/2" RC Hose	1 3/4"	22 lb
RCH2550ANST	50' x 2 1/2" RC Hose	2 1/2"	24 lb

→ **More FIRE HOSE Available - Call for Pricing.**

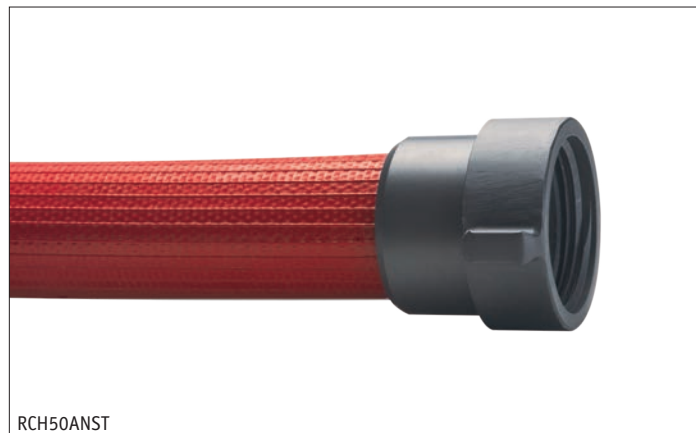

RCH50ANST

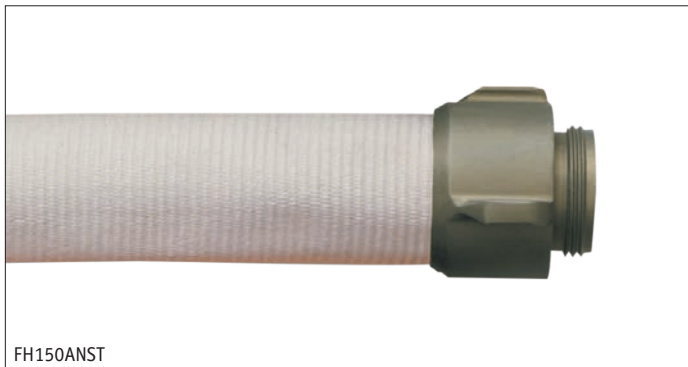

FH150ANST

This lightweight **FORESTRY HOSE** meets the USDA-US Forest Service Standard. Proof test pressure is 500 psi and service test is 250 psi. Aluminum NST coupled.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
FH150ANST	50' x 1" Forestry Hose	1 ³ / ₁₆ "	7 lb
FH1100ANST	100' x 1" Forestry Hose	1 ³ / ₁₆ "	11 lb

Designed for structural, vehicle, grass, and forestry firefighting, **Reel Lite BOOSTER HOSE** features single jacket construction from virgin spun polyester warp yarn that is woven in a twill weave. Polyurethane lined and **Wear Guard** treated for extra toughness, hose has a proof test pressure of 600 psi and a service test of 300 psi. Aluminum NST coupled. Meets NFPA 1961.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
▲ BH150ANST	50' x 1" Booster Hose	1 ³ / ₁₆ "	31 lb
▲ BH1100ANST	100' x 1" Booster Hose	1 ³ / ₁₆ "	60 lb



BH150ANST

FIRE HOSE COUPLINGS, RINGS, AND GASKETS

RACK & REEL HOSE COUPLINGS are made of brass or aluminum and come with rings and gaskets.

P/N	DESCRIPTION	BOWL SIZE
RHCNST	1 ¹ / ₂ " NST RR Cplgs, Brass	1 ¹¹ / ₁₆ "
ARHCNST	1 ¹ / ₂ " NST RR Cplgs, Alum	1 ¹¹ / ₁₆ "
RHTG	RR Tail Gasket	1 ¹¹ / ₁₆ "
SJSG15	1 ¹ / ₂ " RR Swivel Hose Gasket	
ER15	1 ¹ / ₂ " x ⁷ / ₈ " RR Expansion Ring	

SINGLE JACKET HOSE COUPLINGS are made of cast brass or aluminum and come with rings and gaskets.


P/N	DESCRIPTION	BOWL SIZE
SJC15NST	1 ¹ / ₂ " NST SJ Cplgs, Brass	1 ¹³ / ₁₆ "
SJC15NPSHD	1 ¹ / ₂ " NPSH SJ Cplgs, Brass	1 ¹³ / ₁₆ "
ASJC15NST	1 ¹ / ₂ " NST SJ Cplgs, Alum	1 ¹³ / ₁₆ "
ASJC15NPSHD	1 ¹ / ₂ " NPSH SJ Cplgs, Alum	1 ¹³ / ₁₆ "
ASJC25NSTD	2 ¹ / ₂ " NST SJ Cplgs, Alum	2 ¹³ / ₁₆ "
SJC25NST	2 ¹ / ₂ " NST SJ Cplgs, Brass	2 ¹³ / ₁₆ "
SJTG15	SJ Tail Gasket	1 ¹³ / ₁₆ "
SJTG25	SJ Tail Gasket	2 ¹³ / ₁₆ "
SJSG15	1 ¹ / ₂ " SJ Swivel Hose Gasket	
SJSG25	2 ¹ / ₂ " SJ Swivel Hose Gasket	
SER15	1 ¹ / ₂ " x 1 ¹ / ₄ " SJ Expansion Ring	
SER25	2 ⁷ / ₁₆ " x 1 ¹ / ₄ " SJ Expansion Ring	

DOUBLE JACKET HOSE COUPLINGS are made of cast brass or aluminum and come with rings and gaskets.

P/N	DESCRIPTION	BOWL SIZE
DJCNSTD	1 ¹ / ₂ " NST DJ Cplgs, Brass	1 ¹⁵ / ₁₆ "
DJCNPSHD	1 ¹ / ₂ " NPSH DJ Cplgs, Brass	1 ¹⁵ / ₁₆ "
ADJCNSTD	1 ¹ / ₂ " NST DJ Cplgs, Alum	1 ¹⁵ / ₁₆ "
DJC25NSTD	2 ¹ / ₂ " NST DJ Cplgs, Brass	3"
ADJC25NSTD	2 ¹ / ₂ " NST DJ Cplgs, Alum	3"
DJTG15	DJ Tail Gasket	1 ¹⁵ / ₁₆ "
DJTG25	DJ Tail Gasket	3"
SER15	1 ¹ / ₂ " x 1 ¹ / ₄ " DJ Expansion Ring	
DER25	2 ⁷ / ₁₆ " x 1 ¹ / ₂ " DJ Expansion Ring	
SJSG15	1 ¹ / ₂ " DJ Swivel Hose Gasket	
SJSG25	2 ¹ / ₂ " DJ Swivel Hose Gasket	




RHCNST

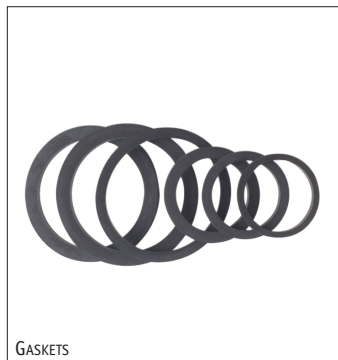

GASKETS



SJC15NST

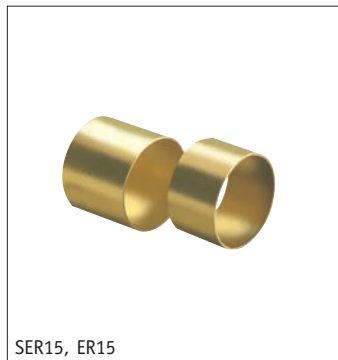

SER15, ER15



DJCNSTD



DER25, SER25



WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.

POLYCARBONATE FIRE HOSE NOZZLES

Brooks' high-impact **POLYCARBONATE NOZZLES** are an economical alternative to the more expensive brass models and come with the same array of spray patterns—straight stream to fog. For Class A and B fires.

NOTE: Intended for firefighting use only.

P/N	DESCRIPTION
10NST	1" Adj Poly Nozzle, 30 gpm, NST
10IPT	1" Adj Poly Nozzle, 30 gpm, NPSH
15NST	1½" Adj Poly Nozzle, 78 gpm, NST
15IPT	1½" Adj Poly Nozzle, 78 gpm, NPSH
25NST	2½" Adj Poly Nozzle, 210 gpm, NST
2520NST	2½" Adj Poly Nozzle w/ Handles, 150 gpm, NST

Rated gallons per minute (gpm) at 100 psi (wide open).

Brooks high-impact **POLYCARBONATE ALL-FOG NOZZLES** are an economical alternative to the more expensive electrical brass models and produce wide angle fog to shutoff (no straight stream). For Class A, B, and C (electrical) fires.

NOTE: Intended for firefighting use only.

P/N	DESCRIPTION
E15NST	1½" All-Fog Nozzle, 78 gpm, NST
E15IPT	1½" All-Fog Nozzle, 78 gpm, NPSH

Rated gallons per minute (gpm) at 100 psi (wide open).

NOZZLE GASKETS

FIRE HOSE NOZZLE GASKETS

P/N	DESCRIPTION
B250G	2½" Nozzle Gasket, NST
GIPT	1½" Nozzle Gasket, NPSH
GNST	1½" Nozzle Gasket, NST
10G	1" NST Gasket, NST

MUNICIPAL NOZZLES

Brooks' collection of **Viper FIREFIGHTING NOZZLES** includes the very best municipal nozzles available. Offered in a variety of styles, sizes, and construction, these nozzles are the professional's choice for municipal and industrial applications.

Standard Features

- E-Lite aluminum construction with brass internal parts
- Fog-to-straight stream with a twist of the bumper
- Flushable without shutting down
- Full-time NST swivels and removable pistol grips
- Constant flow through fog and straight stream

P/N	DESCRIPTION
SG3012	1½" Viper Nozzle, Select gal, 30, 60, 95, 125 gpm
P45SV	1½" Viper Nozzle, Constant Flow, 95 gpm

This **Underwriter's PLAYPIPE** is constructed of cast brass with red Marlin trim and a swivel handle. The discharge end is supplied with **Underwriter's** thread (2³/₁₆" ODM x 12 threads per inch). Measures 30" in length. Inlet: 2½" NST with a standard 1½" discharge tip (1¾" without tip).

P/N	DESCRIPTION
▲ 221	Playpipe



10NST




15NST



25NST



2520NST

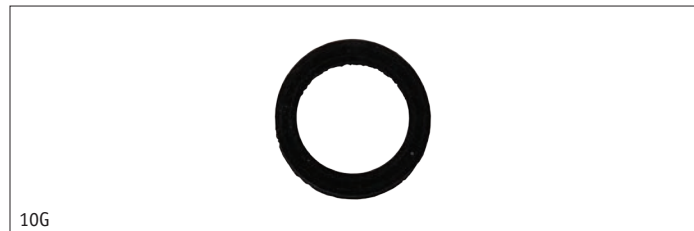

10G



SG3012



P45SV



221

WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.



211N

BRASS FIRE HOSE NOZZLES

Our **BRASS STRAIGHT STREAM NOZZLE** comes with a 1/2" discharge at the tip for powerful sprays that reach a long way, making this 1 1/2" x 10" NST nozzle ideal for industrial washdown. Satin brass finish.

P/N	DESCRIPTION
▲211N	Straight Stream Nozzle



118N, 118I

Industrial-grade **BRASS FOG NOZZLES** are precision machined to perform flawlessly—straight stream through full fog and shutoff. Satin brass finish.

P/N	DESCRIPTION
▲118N	1" Adj Fog Nozzle, 32 gpm, NST, FM
▲118I	1" Adj Fog Nozzle, 60 gpm, NPSH, FM
▲113N	1 1/2" Adj Fog Nozzle, 106 gpm, NST, UL/FM
▲113I	1 1/2" Adj Fog Nozzle, 106 gpm, NPSH, UL/FM
▲114N	2 1/2" Adj Fog Nozzle, 270 gpm, NST, FM



113N, 113I



114N

Economically priced **BRASS FOG NOZZLES** are precision machined for optimum performance from shutoff to full fog. Satin brass finish. UL listed for Class A and B fires and FM approved.

P/N	DESCRIPTION
▲117N	1 1/2" Adj Fog Nozzle, 94 gpm, NST
▲117I	1 1/2" Adj Fog Nozzle, 94 gpm, NPSH

Designed specifically for electrical fires, this industrial **BRASS ALL-FOG NOZZLE** is acceptable for use on all fire classes. Satin brass finish. UL listed for Class A, B, and C (electrical) fires.

P/N	DESCRIPTION
▲115N	1 1/2" All-Fog Nozzle, 96 gpm, NST



117N, 117I



115N

BRASS PIN RACK NOZZLES are made to clip into any standard hose rack unit. They come standard with variable streams (shutoff, straight stream, and fog). Satin brass finish. UL listed for Class A and B fires.

P/N	DESCRIPTION
▲116N	1 1/2" Adj Rack Nozzle, 75 gpm, NST
▲116I	1 1/2" Adj Rack Nozzle, 75 gpm, NPSH



116N



119N

Designed for superior performance, this **HEAVY-DUTY INDUSTRIAL NOZZLE** provides straight stream through full fog and shutoff. Satin brass finish. FM approved.

P/N	DESCRIPTION
▲119N	1 1/2" Adj Heavy-Duty Nozzle, 88 gpm, NST

INDUSTRIAL WASHDOWN NOZZLES come standard with variable streams (shutoff, straight stream, and fog). 100 psi max operating pressure. Satin brass finish.

NOTE: For water use only, not UL listed or FM approved.

P/N	DESCRIPTION
▲120N	1 1/2" Adj Washdown Nozzle, 88 gpm, NST
▲120I	1 1/2" Adj Washdown Nozzle, 88 gpm, NPSH

UL rated gallons per minute (gpm) at 100 psi (wide open).



120N, 120I

WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.

FOAM EDUCTORS

POK's IN-LINE EDUCTORS are easy to install and feature a metering knob for easy, economical dispersal of 0–6% foam solutions. They are simple to maintain and have a low-pressure drop. Eductors come complete with a 10' pick-up tube and an NST inlet.

P/N	DESCRIPTION
POK1448	1 1/2" Foam Eductor, 95 gpm
POK1444	1 1/2" Foam Eductor, 125 gpm

The **POK LOW EXPANSION FOAM NOZZLE** is made of aluminum with a red **NITUFF™** finish. This 8" NST nozzle provides excellent reach and penetration with an expansion ratio of 10.

P/N	DESCRIPTION
DDPPOK9957	1 1/2" Air ASP Foam Nozzle, 95 gpm

CHEMICALS

Brooks carries a wide selection of **FOAM** products to meet your specific needs. The **36AFFF** is all-synthetic film-forming foam, designed for use on water-soluble polar solvents and water-insoluble hydrocarbon flammable liquids. The **3AFFF** and **6AFFF** are synthetic aqueous film-forming foam concentrates, designed for use on non-polar hydrocarbon hazards. 5 gal pails.

NOTE: TFOAM is for live fire-training sessions only.

P/N	DESCRIPTION
36AFFF	3% or 6% AR-AFFF Foam
3AFFF	3% AFFF Foam
6AFFF	6% AFFF Foam
TFOAM	3% or 6% AFFF Virtual Training Foam
AFOAM	Class A Foam

BACKPACK EXTINGUISHING SYSTEM

The **Genfo-45 WILDLAND BACKPACK EXTINGUISHING SYSTEM** features a large 5 gal reservoir and internal baffle for a substantial yet stable transportable water supply. It also includes a double-action hand pump and a 40" x 1/4" hose with a fully adjustable nozzle, a carry handle, and shoulder straps for easy transportation. 4 lb (empty). 25 1/2"H x 19 5/16"W x 1"D.

P/N	DESCRIPTION
WBES45	Genfo-45 Water Backpack
WBES45FT	Genfo-45 Foam Application Tube



RACKS AND REELS

Brooks' semi-automatic **PIN RACKS** come pre-loaded with movable pins and an automatic release mechanism that keeps water out of the hose until the last fold is removed. Red.

NOTE: Pin rack length is measured from center of nipple opening to end of hose clip.


P/N	RACK HOSE	SJ HOSE	HOSE DIA	L	W
DMHR4UL	100'	—	1 1/2"	18"	4"
HR4FMUL	100'	—	1 1/2"	22"	4 1/4"
HR5SJ	—	100'	1 1/2"	22"	4"
HR6FMUL	100'	—	1 1/2"	19"	4 1/4"

P/N	DESCRIPTION
DMHR4UL	Pin Rack, UL/FM For Rack Hose
HR4FMUL	Pin Rack, UL/FM For Rack Hose
HR5SJ	Pin Rack For SJ Hose
HR6FMUL	Pin Rack w/ 2 1/2" Nipple Opening, UL/FM For Rack Hose

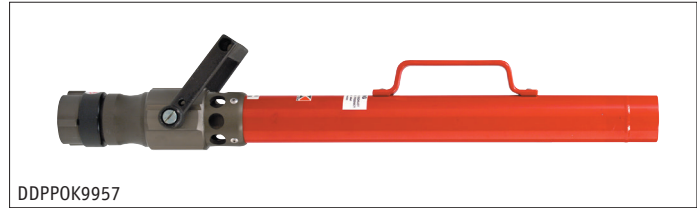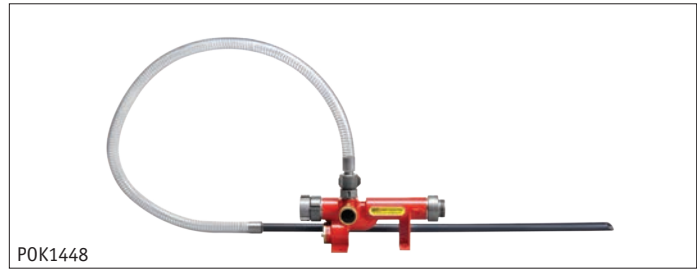

In Use photos may show items not included or available separately.

3 EMERGENCY RESPONSE PRODUCTS



FHWB



311N



FOGC



RPIN



BPIN

PIN RACK ACCESSORIES include wall brackets, rack nipples, nozzle clips, and extra pins for supporting and maintaining hose rack assemblies.

P/N	DESCRIPTION
FHWB	Wall Bracket For Pin Rack w/ 1/2" Opening
▲ 311I	1 1/2" Rack Nipple, NPT x NPSH
▲ 311N	1 1/2" Rack Nipple, NPT x NST
▲ 312N	2 1/2" Rack Nipple, NPT x NST
FOGC	Fog Nozzle Clip For Pin Rack
RPIN	Pin For Badger Powhatan Pin Rack
BPIN	Pin For Brooks & Elkhart Pin Rack



HHR1

Increase the service life of your hose with our red enameled steel **HUMP RACKS**. They provide stress-free fire hose storage by supporting the hose weight at its center, relieving strain on the folded ends and couplings.

P/N	RACK HOSE	SJ HOSE	DJ HOSE	HOSE DIA	L	H	W
HHR1	200'	100'	75'	1 1/2"	33 1/2"	27 7/8"	4 3/8"
HHR2	200'	100'	75'	2 1/2"	33 1/2"	27 7/8"	5 13/16"

P/N	DESCRIPTION
HHR1	Hump Rack For 1 1/2" Hose
HHR2	Hump Rack For 2 1/2" Hose



RC25 In Use

Brooks' RACK COVERS are made of durable vinyl to protect your hose rack assemblies from dirt and grime. They are highly visible and come with hook-and-loop closures to ensure a proper fit and easy access in an emergency.



RC25LS



HRC1

P/N	DESCRIPTION	L X H X W
RC25	Cover, Red For Pin Rack	21" x 24" x 5"
RC25L	Cover, Red For Pin Rack	21" x 30" x 5"
RC25LS	Cover, Orange, Spanish For Pin Rack	21" x 30" x 5"
RC32	Cover, Red For Pin Rack	32" x 24" x 6"
HRC1	Cover, Red For HHR1 Hump Rack	34" x 28 1/2" x 5"
HRC2	Cover, Red For HHR2 Hump Rack	34" x 28 1/2" x 6 1/4"

		Total Loops Of Hose		
		2	3	4
Hose Length	50'	12'	8'	6'
	75'		12'	9'
	100'			12'

The **FireTech™ HOSE HANGER ASSEMBLY** is constructed of aluminum alloy and conveniently accommodates 100' of lined or unlined hose up to 2 1/2". The top shoulder is spring loaded so that water pressure or a single pull is sufficient to release the hose. It stores hose close to walls or columns to minimize damage as well as allowing for fewer bends in the hose, prolonging its life. Mounting instructions included.

P/N	DESCRIPTION
THH	Hose Hanger Assembly

In Use photos may show items not included or available separately.

WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.

Brooks' steel **ECONOMY HOSE REELS** offer quality and value in a sturdy design. They come with a 14 ga steel wall bracket that swings 180°. Red baked enamel finish.

P/N	RACK HOSE	SJ HOSE	DJ HOSE	HOSE DIA	L	H	W
FHR	100'	75'	—	1½"	23½"	18"	6¼"
FHR24	150'	100'	—	1½"	29"	24"	6¼"

P/N	DESCRIPTION
FHR	18" Economy Hose Reel
FHR24	24" Economy Hose Reel

Brooks' **HEAVY-DUTY HOSE REELS** feature solid 16 ga steel sides and hubs, while the mounting hardware features a welded steel 1" x ¾" reel bracket with a 1½" x ¼" steel wall bracket for impressive support. The wall bracket swings 180° and easily adapts to pipes (1½"–3") with optional pipe bracket set **PBSET**. Each reel comes with a hook-and-loop back strap to keep hose securely wound. Red baked enamel finish.

P/N	RACK HOSE	SJ HOSE	DJ HOSE	HOSE DIA	L	H	W
HDR19	100'	75'	50'	1½"	23¾"	19"	5¾"
HDR25	150'	100'	75'	1½"	30"	25"	5¾"
HDR25HC	300'	200'	150'	1½"	30"	25"	8¾"
HDR25HC	150'	100'	75'	2½"	30"	25"	8¾"

P/N	DESCRIPTION
HDR19	19" Heavy-Duty Hose Reel
HDR25	25" Heavy-Duty Hose Reel
HDR25HC	25" High-Capacity, Heavy-Duty Hose Reel
PBSET	Pipe Brackets, Pkg/2 For Heavy-Duty Reels
VBSBK	Black Velcro Strap

Brooks' **REEL COVERS** are manufactured to the same standards as our rack covers, offering a custom fit for both our **Economy** and **Heavy-Duty Hose Reels**. These durable vinyl covers are a must for protecting a hose reel investment. Red.

P/N	DESCRIPTION	L X H X W
FHRC18	Cover For FHR & HDR19 Reels	20" x 19" x 5"
FHRC24	Cover For FHR24 & HDR25 Reels	26" x 25" x 5"
FHRC24DW	Cover For HDR25HC Reel	26" x 25" x 8"

MUNICIPAL HAND TOOLS

Designed for today's fire department connections, this assortment of quality **WRENCHES** cover all the popular sizes and styles in storz and threaded adapters (pin or rocker lugs).

P/N	DESCRIPTION
STW	Storz x Universal Spanner, Alum Fits 4"–5" Storz & 1½"–3" Rocker Lugs
STH	Storz Spanner Wrench Holder (Empty)
W570	Universal Spanner Wrench, Alum Fits 1½"–3" Pin/Rocker Lugs
W580	Standard Hydrant/Spanner Wrench, Steel/Ductile Iron Fits 1½"–6" Pin/Rocker Lugs
W575	Heavy-Duty Hydrant/Spanner Wrench, Steel/Ductile Iron Fits 1½"–6" Pin/Rocker Lugs
K48	Hydrant/Spanner Wrench Holder (Empty)
AFS	Folding Pocket Spanner Wrench, Plastic Fits Pin/Rocker Lugs thru 4"



FHR




HDR19



FHRC18




STW



STH



W570



W580



W575



K48 In Use



AFS

In Use photos may show items not included or available separately.

3 EMERGENCY RESPONSE PRODUCTS



RQR



RST1

This collection of **MULTI-PURPOSE RESCUE TOOLS** features the **Res-Q-Rench** that is five tools in one—universal spanner, pry tool, window punch, seat belt cutter, and gas shutoff. The small but effective **Resqme**® tool easily shatters tempered glass and cuts through safety belts in seconds. A must-have for service techs and first responders alike.

P/N	DESCRIPTION
RQR	Res-Q-Rench Fits 4", 5" Storz & Rocker Lugs thru 3"
RST1	Resqme Tool



D406M

FIRE AXES and **ACCESSORIES** include some of the finest emergency entry tools available today. The discriminating professional has a choice of three different axes—with or without pick heads (all with 6 lb heads) and either solid hickory or yellow fiberglass handles. Optional mounting bracket and hooks sold separately.

P/N	DESCRIPTION
407Y*	Flat Head Fire Axe w/ 34" Fiberglass Handle
D406M	Pick Head Fire Axe w/ 36" Hickory Handle (Domestic)
D406Y	Pick Head Fire Axe w/ 36" Fiberglass Handle (Domestic)
AB408	Axe Bracket & Hook

*WHILE QUANTITIES LAST!



AB408



DDP58589GZ

TESTING EQUIPMENT

ELECTRIC HOSE TESTER accommodates 1½" and 2½" fire hose and can be used in wet conditions with its 120 VAC wash-down electric motor. Comes standard with quick connect adapters and can be used to meet NFPA 1962 Hose Testing Guidelines. Hose adapters sold separately, see page 52.

P/N	DESCRIPTION
DDP58589GZ	Triple Electric Hose Tester
DDP58524GZ	Cap, 1½" Hose Tester, NST
DDP58526GZ	Cap, 2½" Hose Tester, NST
DDP58585GZ	Plug, 1½" Hose Tester, NST
DDP58587GZ	Plug, 2½" Hose Tester, NST



CG25



HH26

Our selection of **HYDRAULIC TEST EQUIPMENT** features a variety of highly engineered products and instruments to handle your calculation needs. The **Line** and **Cap Gauges** are easy to attach to hydrants, valves, etc., and provide a quick check of water pressure. The handheld **Pitot Gauge** and **Hydrant Test Kit** offer convenient methods of checking straight tip nozzle and hydrant pressures quickly and accurately.



HK25

P/N	DESCRIPTION
CG25	Cap Gauge (0–300 psi), 2½" NST
LG25	Line Gauge (0–300 psi), 2½" NST
HH26	Pitot Gauge (0–160 psi)
HK25	Hydrant Test Kit (0–160 psi), 2½" NST

HOSE VALVES

Engineered for trouble-free operation, these **ANGLE HOSE VALVES** are designed for use with hose storage devices and hydrants. Each valve has a 300 lb rating and is UL listed and FM approved. Constructed of cast brass with red or silver handwheels.

P/N	DESCRIPTION
▲411	1 1/2" NPT(F) x 1 1/2" NPT(F) Angle Valve, Red
▲B411	1 1/2" NPT(F) x 1 1/2" NPT(F) Angle Valve, Silver (Domestic)
▲412	2 1/2" NPT(F) x 2 1/2" NPT(F) Angle Valve, Red
▲413	1 1/2" NPT(F) x 1 1/2" NST(M) Angle Valve, Red
▲414	2 1/2" NPT(F) x 2 1/2" NST(M) Angle Valve, Red
▲B414	2 1/2" NPT(F) x 2 1/2" NST(M) Angle Valve, Silver (Domestic)
▲415	1 1/2" NPT(F) x 1 1/2" NPSH(M) Angle Valve, Red



PRESSURE RESTRICTING ANGLE HOSE VALVES can be adjusted to restrict pressures up to 175 lb and come with locking pin devices that restrict full opening by untrained personnel. Pin may be removed by fire personnel for unrestricted operation in emergencies. UL listed. Cast brass construction with red handwheels.

P/N	DESCRIPTION
▲421	1 1/2" NPT(F) x 1 1/2" NPT(F) PR Valve
▲422	2 1/2" NPT(F) x 2 1/2" NPT(F) PR Valve
▲423	1 1/2" NPT(F) x 1 1/2" NST(M) PR Valve
▲424	2 1/2" NPT(F) x 2 1/2" NST(M) PR Valve



Heavy-duty **GATE VALVES** are designed for use on pump test headers and dry systems as a fire hose connection. Valves feature straightway patterns and come with caps and chains. Other features include solid wedge discs with tapered seats and 300 lb ratings. UL listed and FM approved. Cast brass construction with red handwheels.

P/N	DESCRIPTION
▲433	2 1/2" NPT(F) x 2 1/2" NST(M) Gate Valve
▲434	3" NPT(F) x 2 1/2" NST(M) Gate Valve



VALVE REPLACEMENT PARTS. Red handwheels fit **Giacomini** valves; silver handwheels fit **Powhatan**.

P/N	DESCRIPTION
PHW15KIT	Handwheel For Powhatan 1 1/2" Valve
PHWN15	Handwheel Nut For Powhatan 1 1/2" Valve
GHW15	Handwheel For Giacomini 1 1/2" Valve
PHW25KIT	Handwheel For Powhatan 2 1/2" Valve
PHWN25	Handwheel Nut For Powhatan 2 1/2" Valve
GHW25	Handwheel For Giacomini 2 1/2" Valve
GHWN	Handwheel Nut For Giacomini Valve
GSRS15	Rubber Seal For Giacomini 1 1/2" Angle Valve
PSRS15	Rubber Seal For Powhatan 1 1/2" Angle Valve
PSRS25	Rubber Seal For Powhatan 2 1/2" Angle Valve



WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.

ADAPTERS, CAPS, AND PLUGS

Female x Male **BRASS HEXAGON ADAPTERS** are used to change threads. Rigid hexagon design in cast brass.

P/N	DESCRIPTION
▲ 711	1 1/2" PCT(F) x 1 1/2" NST(M) Adapter
▲ 712	1 1/2" NPT(F) x 1 1/2" NST(M) Adapter
▲ 713	1 1/2" NST(F) x 1 1/2" NPT(M) Adapter
▲ 714	1 1/2" NPSH(F) x 1 1/2" NST(M) Adapter
▲ 715	2 1/2" NPT(F) x 2 1/2" NST(M) Adapter
▲ 716	2 1/2" NST(F) x 2 1/2" NPT(M) Adapter

Female x Male **BRASS REDUCERS** are used to change threads or size. Pin lug design in cast brass.

P/N	DESCRIPTION
▲ 721	2 1/2" NST(F) x 1 1/2" NST(M) Reducer
▲ 722	2 1/2" NPSH(F) x 1 1/2" NST(M) Reducer
▲ 724	2 1/2" NST(F) x 3/4" GHT(M) Reducer
▲ 725	2 1/2" NST(F) x 1 1/2" NPSH(M) Reducer
▲ 726	1 1/2" NST(F) x 3/4" GHT(M) Reducer
▲ 727	1 1/2" NST(F) x 1" NST(M) Reducer

Male x Male **BRASS HEXAGON NIPPLES** are used to change configuration, threads, or size. Rigid hexagon design in cast brass.

P/N	DESCRIPTION
▲ 731	1 1/2" NPT(M) x 1 1/2" NST(M) Nipple
▲ 732	2 1/2" NPT(M) x 2 1/2" NST(M) Nipple
▲ 733	2 1/2" NPT(M) x 1 1/2" NST(M) Nipple

Female x Female **BRASS DOUBLE SWIVEL ADAPTERS** are used to connect two male hose threads. Dual pin lug swivel design in cast brass.

P/N	DESCRIPTION
▲ B741	1 1/2" NST(F) x 1 1/2" NST(F) Swivel Adapter
▲ B742	2 1/2" NST(F) x 2 1/2" NST(F) Swivel Adapter

Female x Male **BRASS HEXAGON BUSHINGS** are used to change threads or size. Rigid hexagon design in cast brass.

P/N	DESCRIPTION
▲ 751	2" NPT(F) x 2 1/2" NST(M) Bushing
▲ 752	1 1/2" NST(F) x 2 1/2" NST(M) Bushing
▲ 753	1 1/2" NST(F) x 2 1/2" NPT(M) Bushing

Female x Female **BRASS HEXAGON ADAPTERS** are used to change threads or connect two males. Rigid hexagon design in cast brass.

P/N	DESCRIPTION
▲ 761	2 1/2" NST(F) x 2 1/2" NPT(F) Hex Adapter
▲ 762	1 1/2" NST(F) x 1 1/2" NPT(F) Hex Adapter
▲ 763	1 1/2" NST(F) x 1 1/2" NST(F) Hex Adapter

Female x Female **BRASS SNOOTS** are used to connect to flush inlet connections. Rigid hexagon design with pin lug swivel in cast, polished, or chrome-plated brass.

P/N	DESCRIPTION
▲ 811	2 1/2" NPT(F) x 2 1/2" NST(F) Snoot, Cast
▲ 811PB	2 1/2" NPT(F) x 2 1/2" NST(F) Snoot, Polished
811PC	2 1/2" NPT(F) x 2 1/2" NST(F) Snoot, Chrome

Female x Male **BRASS SNOOTS** are used to connect to flush hydrant connections. Rigid hexagon design with pin lug swivel in cast brass.

P/N	DESCRIPTION
▲ 821	2 1/2" NST(F) x 2 1/2" NPT(M) Snoot
▲ 822	1 1/2" NST(F) x 1 1/2" NPT(M) Snoot

WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.



711



721



731



B741



752



761



811PB



822

BRASS CAPS & CHAINS are used on fire department connections, hydrants, valves, etc., to hold back water. Pin lug design in cast, polished, or chrome-plated brass.

P/N	DESCRIPTION
▲ 511I	1½" NPSH Cap, Cast
▲ 511N	1½" NST Cap, Cast
▲ 511NPB	1½" NST Cap, Polished
▲ 511NPC	1½" NST Cap, Chrome
▲ 512N	2½" NST Cap, Cast
▲ B512N	2½" NST Cap, Cast (Domestic)
▲ 512NPB	2½" NST Cap, Polished
▲ 512NPC	2½" NST Cap, Chrome
512NPCRL	2½" NST Cap, Chrome, Rocker Lug

BRASS PLUGS & CHAINS are used on fire department inlet connections to keep inlet ports free of debris. Pin lug design in cast, polished, or chrome-plated brass.

P/N	DESCRIPTION
▲ 513N	2½" NST Plug, Cast
▲ 513NPB	2½" NST Plug, Polished
513NPC	2½" NST Plug, Chrome
▲ 513NPCRL	2½" NST Plug, Chrome, Rocker Lug
▲ 514N	1½" NST Plug, Cast

PLASTIC CAPS & CHAINS are an inexpensive way to protect hydrant threads and a viable replacement for brass caps when theft is an issue. Models **B150** and **B250** thread on, while the **U250** pushes/pulls on and off. Red.


P/N	DESCRIPTION
B150IPT	1½" NPSH Plastic Cap
B150NST	1½" NST Plastic Cap
B250	2½" NST Plastic Cap
U250	2½" Universal Plastic Cap
B250G	Gasket For B250

Our **ALUMINUM BREAK CAPS** serve the same function as the brass and plastic caps. But instead of screwing or pushing/pulling on and off, they are easily broken with a hydrant/spanner wrench. Caps attach to inlets, courtesy of two eye bolts that slip over pin lugs. Pkg/2.


P/N	DESCRIPTION
ABCA	2½" Alum Break Caps, Silver
ABCR	2½" Alum Break Caps, Red

The most economical way to protect fire department connection inlets is with **PLASTIC BREAK CAPS**. Choose either the **PAC**, which uses an adjustable bar that threads onto any hose thread, or the **PBC2**, which uses eye bolts to secure the cap via the inlet's pin lugs. Both fit 2½" inlets and are easily broken with a hydrant/spanner wrench. Red. Pkg/2.

P/N	DESCRIPTION
PAC	Adjust-A-Plug
PBC2	Plastic Break Caps w/ Eye Bolts



511N

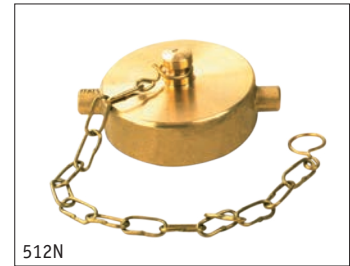

512N




513N, 514N




B150IPT




U250



ABCA

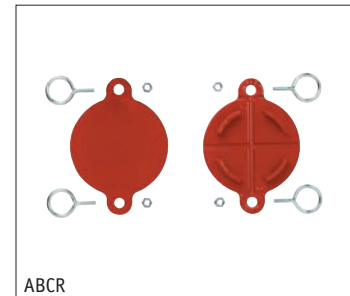

ABCR

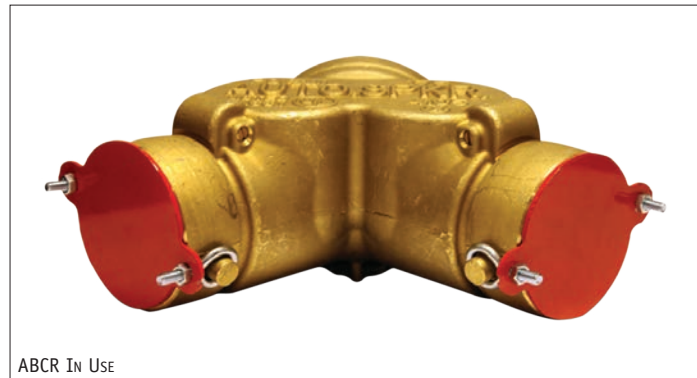

ABCR In Use



PAC



PBC2

WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.

In Use photos may show items not included or available separately.



611

MUNICIPAL VALVES

Precision-made **GATED WYE LEADER LINE SIAMESE** come with ball valves built into the body so that either lead can be used independently of the other. **Gated Wyes** feature 2½" NST female swivel inlets and 1½" male outlets in two different threads. Other features include cast brass bodies, painted red with polished-chrome trim, and rocker lug swivels.

NOTE: Not recommended for charged pre-connected hose lines!

P/N	DESCRIPTION
▲611	Gated Wye, NST (Outlets)
▲611NPSH	Gated Wye, NPSH (Outlets)



9443

Gated Wye and **Swivel Gate MUNICIPAL VALVES** are engineered from lightweight cast aluminum with powder-coated bodies and hard anodized extruded aluminum inlets/outlets for maximum performance and corrosion resistance. The **Gated Wye** also has powder-coated handles with an orange peel finish for easy gripping, while the **Swivel Gate Valve** features a non-rising stainless steel stem with aluminum hand crank for fast, trouble-free operation.

P/N	DESCRIPTION
9443	2½" NST(F) x 2½" NST(M) Alum Swivel Gate Valve
9611	2½" NST(F) x 1½" NST(M) x 1½" NST(M) Alum Gated Wye



9611

SINGLE HYDRANT GATE VALVES are used on fire hydrant outlets for slow and precise control of flow (throttling). Solid brass valves feature metal-to-metal seats and non-rising stems. They come standard in straightway patterns and with 300 lb ratings.

P/N	DESCRIPTION
▲443	2½" NST(F) x 2½" NST(M) Gate Valve w/ Swivel
▲B443	2½" NST(F) x 2½" NST(M) Gate Valve w/ Swivel (Domestic)



443



B443



WARNING: This product may contain a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm.